

06-01-00

A

05/31/00
JC813 U.S. PTO

EXPRESS MAIL CERTIFICATE

Date 5-31-00 Label No. EL628220572
I hereby certify that, on the date indicated above I deposited this paper or fee with the U S Postal Service and that it was addressed for delivery to the Commissioner of Patents & Trademarks, Washington, DC 20231 by "Express Mail Post Office to Addressee" service.

Name (Print)

Signature

G. KARASZI *G. Karaszi*

PLEASE CHARGE ANY DEFICIENCY UP TO \$300.00
OR CREDIT ANY EXCESS IN FUTURE FEES DUE
WITH RESPECT TO THIS APPLICATION TO OUR
DEPOSIT ACCOUNT NO 04-0100

JCS83 U.S. PTO
09/584640
05/31/00

DARBY & DARBY P.C.

805 Third Avenue
New York, New York 10022
212-527-7700

File No: 0630/0G528

Date: May 31, 2000

Hon. Commissioner of
Patents and Trademarks
Washington, DC 20231

Sir:

Enclosed please find an application for United States patent as identified below:

Inventor/s (name ALL inventors): Jee Loon LOOK, Paul Joseph COOPER, Khawla Abdullah ABU-IZZA, Joyce H. WILSON, Krishna P. RAMAN and Vincent Hon-Kin LI

Title: MULTI-COMPOSITION STICK PRODUCT AND A PROCESS AND SYSTEM FOR MANUFACTURING THE SAME

including the items indicated:

1. Specification and 50 claims: 9 indep.; 41 dep.; _ multiple dep.
2. ☒ Unexecuted Declaration and power of attorney
3. ☒ Formal drawings, 13 sheet (Fig.)
☐ Informal drawings, _ sheets (Fig.)
4. ☐ Assignment for recording to:
5. ☐ Verified Statement Claiming Small Entity Status
6. ☐ Check in the amount of \$00, (\$00 filing; \$ recording)
(See attached Fee Computation Sheet)

7. ☐ Preliminary Amendment.
8. ☐ Please amend the description by inserting the following paragraph after the line containing the title on page 1: "This patent application claims the priority of U.S. provisional patent application No. 60/_____, which is incorporated herein by reference."

Priority is claimed for this application, corresponding application/s having been filed as follows:

Country:

Number:

Date:

The priority documents ☐ are enclosed
☐ will follow.

Respectfully submitted,



Cheryl F. Cohen

Reg. No. 40,361

Attorney for Applicant(s)

(D&DForms/PTO-1)

PATENT FEE COMPUTATION SHEET

	No. of Claims Presented	Extra Claims Previously Paid For	Number of Extra Claims	Rate
Basic Fee				\$690.00
Design Application				\$0.00
Plant Application				\$0.00
Total Claims	50 - 20	- 30 =	x \$18.00	\$540.00
Independent Claims	9 - 3	- 6 =	x \$78.00	\$468.00
Multiple Dependent Claims		x- if so, add	\$260.00	\$
Surcharge for late submission of filing fee and/or declaration (\$130.00)				\$
SUBTOTAL				\$1,698.00
[] Small Entity REDUCTION (Half of Subtotal)				\$
Fee for recordation of assignment (\$40.00)				\$
Charge for filing non-English language application (\$130.00)				\$
TOTAL				\$1,698.00

EXPRESS MAIL CERTIFICATE

Date 5-31-00 Label No. EL628220572

I hereby certify that, on the date indicated above I deposited this paper or fee with the U.S. Postal Service and that it was addressed for delivery to the Commissioner of Patents & Trademarks, Washington, DC 20231 by "Express Mail Post Office to Addressee" service.

G KARASZI G Karaszi
Name (Print) Signature

0630/0G528

MULTI-COMPOSITION STICK PRODUCT
AND A PROCESS AND SYSTEM FOR MANUFACTURING THE SAME

Field of the Invention

The present invention relates to a multi-composition stick product comprising a molded stick composition, such as a lip balm, sun screen, deodorant, or glue stick, provided in a container which serves as the mold during manufacture and from which the composition may be advanced or ejected. The invention also relates to a process and system for manufacturing the stick product.

Description of Related Art

Lip balms, deodorants, sunscreens, and glue sticks, usually have a single homogenous color or fragrance. These products typically are aesthetically neutral or unpleasing. As a result, patients, in particular, children, often do not apply such topical products and, therefore, do not benefit from these products. For example, children often do not apply a sunscreen lip balm for protecting their lips before playing outside.

Therefore, it is desirable to develop lip balms, deodorants, sunscreens, glue sticks, and related products which are aesthetically pleasing to increase use of such products and consumer/patient compliance.

Additionally, since lip balm compositions are often the same homogenous color and fragrance, patients often cannot identify one lip balm formulation from another. For example, a patient having a lip balm with a sunscreen, *e.g.*, paba, and another without sunscreen, needs to be able to readily distinguish the two products from one another. Similarly, it would be desirable to easily identify any specific type of lip balm, deodorant, sunscreen, glue stick, or related product.

Homogenous compositions may be manufactured using conventional techniques, such as a nozzle fill or flood fill method. In the nozzle fill method a homogeneous composition is dispensed from a filling nozzle directly into the container itself, whereas in the flood fill method the container is placed in an opening of a tray and the composition is poured onto the tray thereby flooding the tray and, in turn, filling the container. These conventional techniques, however, are not suitable for use in manufacturing a multi-composition stick product, that is, a stick product which contains two or more compositions.

Methods have been developed for use in manufacturing multi-color lipsticks that are manufactured in a mold and then removed and transferred to a separate container. In such products the composition does not contact the walls of the container in which the product is ultimately disposed. For example, U.S. Patent No. 4,291,018 discloses a method for manufacturing a lipstick having a construction of the core-sheath type which comprises two different compositions arranged as an inner core surrounded by an outer sheath. The formation of a core-sheath type lipstick is realized using a molding body having an upper part and a lower part. A rod is inserted into the molding body and then the molten mass of the lipstick composition for the molding of the sheath is poured into the cavity and cooled to form the sheath portion around the rod. Then the rod and upper part of the molding body are removed thereby forming a core cavity. The upper part is remounted and a molten mass of the composition for the molding of the core is poured into the core cavity and cooled to solidify the composition. Thereafter, the upper part is demounted and the molded product is removed from the lower part and mounted in a suitable case to obtain a lipstick. As a finished product the lipstick does not contact the inner walls of the container.

U.S. Patent No. 4,743,443 discloses a method for manufacturing a tri-color lipstick divided into three parallel laminae. A T-shaped centrally disposed insert is placed in a cylindrical cavity main body portion of a mold. First and third laminae are poured while maintaining a space for the later pouring of the second intermediate lamina. Thereafter, the insert is removed and the second intermediate lamina is poured. The tri-color lipstick is then removed from the mold and disposed so as not to contact the inner walls of the container.

U.S. Patent Nos. 4,786,449 and 4,602,886 teach manufacturing a multi-color marking implement in a transparent lipstick type container that also serves as the mold during

the casting process. A variegated color pattern is built up by dispensing different color compositions, dropwise, into the container. The elimination of the use of a mold between colors allows mixing at the interface between adjacent colors, thereby forming a random design. The dropwise method used to generate a random pattern is also disadvantageously slow.

It is therefore desirable to develop a multi-composition stick product in which the compositions, which preferably differ in at least one component, *e.g.*, color, are arranged in a predetermined non-random pattern that is reproducible, and to develop a method and apparatus for manufacturing the same.

Summary of the Invention

The present invention provides a multi-composition stick product comprising a container and a molded stick composition disposed so as to contact the walls of the container and be advanceable in the container. The stick composition comprises a first composition and a second composition. The first and second compositions differ in at least one component, *i.e.*, the first or second composition contains a component which is not contained in the other composition, and are arranged in a predetermined non-random pattern that is reproducible.

Also disclosed is a method for manufacturing a multi-composition stick product as described above. A mold shaft is first inserted into the container and a first composition of stick composition is dispensed into the container around the mold shaft. The mold shaft is then removed from the container to form a cavity and at least a portion of the cavity is filled with a second composition of stick composition.

In another embodiment of a method for manufacturing the multi-composition stick product in accordance with the present invention a first composition of stick composition is dispensed into the container. While the first composition is in a molten state, a mold shaft is then inserted into the container so as to displace the first composition therein. Once the first composition is sufficiently solidified, the mold shaft is removed from the container to form a cavity. Finally, at least a portion of the cavity is filled with a second stick composition.

Furthermore, the invention is directed to a system for carrying out the method described above. The system includes a filling nozzle including a mold shaft insertable into the

container and an outer barrier disposed about at least a portion of the mold shaft so as to form a passageway between the outer barrier and the mold shaft for receiving the first composition.

According to a special aspect of this invention, a stick product is provided comprising a container and a molded stick composition disposed so as to contact the walls of the container and be advanceable in the container. The container confers a desired shape or design to the stick composition and the stick product. At least a portion of the outer and/or inner contour of the container is non-circular. For example, the outer and inner contours of the container may be heart shaped. Alternatively, the outer contour of the container may be heart shaped while the inner contour is circular or vice versa. In this embodiment, the stick composition may have only one phase (homogeneous) or two or more distinct phases.

An alternative embodiment of a system in accordance with the present invention for simultaneously dispensing the first and second compositions includes a first filling nozzle for dispensing the first composition and a second filling nozzle for dispensing the second composition. The first and second filling nozzles are connected together using a securing mechanism and, when assembled are capable of being inserted together into the container.

Brief Description of the Drawings

The foregoing and other features of the present invention will be more readily apparent from the following description and drawings of illustrative embodiments of the invention wherein like reference numbers refer to similar elements throughout the several views and in which:

Figure 1a is a perspective view of an exemplary multi-composition stick product advanced from its container in accordance with the present invention;

Figure 1b is a cross-sectional view of the multi-composition stick product of Figure 1a along the line 1b-1b;

Figure 1c is a cross-sectional view of the multi-composition stick product of Figure 1a along the line 1c-1c;

Figure 1d is a perspective view of a multi-composition stick product advanced from an exemplary container having the same inner and outer heart shaped contour;

Figure 1e is a perspective view of a multi-composition stick product advanced from an exemplary container having a cylindrical outer contour and a heart shaped inner contour;

Figures 2a through 2x are perspective views of exemplary predetermined patterns formed by the composition stick;

Figures 3a-3d show the operating steps of a first embodiment of an exemplary nozzle fill system for manufacturing a multi-composition stick product in accordance with the present invention;

Figure 4a is a perspective view of an alternative filling nozzle in accordance with the present invention;

Figure 4b is a cross-sectional view of the filling nozzle in Figure 4a inserted into a container;

Figure 5 is the nozzle fill system in Figure 3a modified for simultaneously manufacturing a plurality of multi-compositions stick products in accordance with the present invention;

Figures 6a-6e show the operating steps of a second embodiment of an exemplary nozzle fill system for manufacturing a multi-composition stick product in accordance with the present invention;

Figures 7a-7d show the operating steps of a third embodiment of an exemplary nozzle fill system for manufacturing a multi-composition stick product in accordance with the present invention;

Figure 8a is a side view of an exemplary multi-nozzle fill system in accordance with the present invention before being inserted in a container;

Figure 8b is a side view of the exemplary multi-nozzle fill system in Figure 8a after being inserted in the container;

Figure 8c is a bottom view of the multi-nozzle along line 8c-8c in Figure 8a;

Figures 9a-9f show the operating steps of an exemplary flood fill system for manufacturing a multi-composition stick product in accordance with the present invention; and

Figures 10a-10d show the operating steps of an exemplary cork screw construction of a mold or mold shaft for manufacturing a multi-composition stick product in accordance with the present invention.

5 **Detailed Description of the Invention**

In the application the following terms are defined. The term "stick product" is defined as a product comprising a container and a stick composition, where the stick composition is: (a) manufactured directly in the container in which it is sold, so that the container also serves as a mold during the casting process, whereby the composition is in
10 contact with the side walls of the container, and (b) advanced or ejected, such as by mechanical rotation or mechanical force without rotation, through an open end of the container. The term "stick composition" is defined as a malleable, semi-solid composition that is sufficiently solid so as to substantially retain its shape when advanced or ejected from an open end of the container, while capable of leaving a desired residue when applied by swiping.

15 By way of example, the multi-composition stick product in accordance with the present invention, as well as the apparatus and method for manufacturing the same, is shown and described for a multi-color stick composition disposed in a cylindrical housing or container and forming a predetermined design pattern comprising a heart shaped first composition core by a second composition sheath.

20 Figure 1a is a perspective view of an example multi-composition stick product 10 advanced in the container. The multi-composition stick product 10 comprises a container 12 and a molded stick composition 14 disposed so as to contact the walls of the container and be advanceable in the container. The stick composition in Figure 1a comprises a first composition and a second composition. It is, however, within the intended scope of the
25 invention for the stick composition to comprise more than two compositions. The first and second compositions are preferably chemically similar materials. In a preferred embodiment, the top surface 16 of the stick composition 14 is substantially planar.

The term "chemically similar materials" as used herein is defined as materials which have substantially the same physical, chemical and/or medicinal properties under ambient
30 conditions, but which differ in a component or components that result in two or more distinct

or distinguishable phases of the composition. The different "component" refers to, for example, a medicament; colorant; fragrance; flavorant; sunscreen; preservative; conditioner, such as a skin conditioning agent; moisturizer; emollient; or surfactant. For example, one composition may have one color while the other composition has a different color. Generally, such a component will comprise less than about 20% by weight, preferably less than about 5% by weight, and more preferably, less than about 1% by weight of the composition in which it is found, based upon 100% by weight of total composition.

The outer and inner contours of the container may be any desired shape, such as cylindrical, square, triangular, or heart shape. The outer and inner contours of the container may be the same, or different, from one another. For example, in Figure 1d the inner and outer contour of the container are the same heart shape, whereas in Figure 1e the container has a cylindrical outer contour and a heart shape inner contour.

Preferably, the container is made of a transparent or translucent material so that the consumer may view the predetermined non-random pattern formed by the stick composition through the container.

The compositions of the stick composition disposed in the container are arranged in a predetermined non-random pattern that is reproducible. Any desired pattern may be selected, for example, a heart (Figs. 1a-1d); evergreen tree (Fig. 2a); ying-yang (Fig. 2b); 5-pointed star (Fig. 2c); 6-pointed star (Fig. 2d); sun (Fig. 2e); circle (Fig. 2f); half and half circle (Fig. 2g); heart with an arrow (Fig. 2h); lateral stripes (Figs. 2i); diagonal stripes (barber pole) (Fig. 2j); longitudinal stripes (Fig. 2k); happy face (Fig. 2l); sad face (Fig. 2m); tree (Fig. 2n); crescent moon (Fig. 2o); cross (Fig. 2p); 4-pointed star (Fig. 2q); flower (Fig. 2r); ellipse (Fig. 2s); wave (Fig. 2t); lightening bolt (Fig. 2u); pinwheel (Fig. 2v); flag (Fig. 2w); lips (Fig. 2x); one or more alphanumeric letters; any other geometric shape, such as a polygon; or any combination of the foregoing. An infinite number of different permutations are possible by varying the outer and/or inner contour of the container and/or predetermined non-random pattern of the stick composition within the container. Each cross-section perpendicular to the longitudinal axis of the stick composition may contain the same multicolor image (*e.g.*, for a heart image) or a different multicolor image (*e.g.*, for an image having horizontal or diagonal

stripes). Preferably, there is little, if any, intermixing at the interface of the compositions so as to maintain the integrity of the predetermined non-random pattern.

In one embodiment, the stick composition is a lip balm, in which one composition of the stick composition contains a sunscreen while the other does not. These two compositions can be arranged, *e.g.*, in a half circle pattern, as shown in Figure 2g, or in a ying-yang pattern, as shown in Figure 2b. This permits a user to apply lip balm with and without sunscreen. For example, the sunscreen-free composition may be applied when the user is indoors, while the sunscreen composition may be applied when the user is outdoors. The sunscreen-containing composition preferably has a different color than the non-sunscreen-containing composition.

According to another embodiment, to facilitate manufacture the stick composition has a first composition or phase having a melting point greater than that of the second composition or phase. Introduction of the second phase, at a lower temperature will avoid or minimize melting of the first composition, thus optimizing the design integrity by minimizing mixing at the interface of the two compositions. The melting point of the first composition may be increased by, for example, adding additional carnuaba wax. Preferably, the melting point of the first composition is at least about 5° C and more preferably about 10° C greater than that of the second composition. According to a preferred embodiment, the first composition or phase has a melting point greater than about 60° C and the second composition or phase has a melting point of less than about 60° C.

In another embodiment, two compositions having the same or substantially the same melting point may be used, wherein the second composition is dispensed in the container, after the first composition has been dispensed into the container and cooled. The same design integrity can be achieved by cooling the first composition to a sufficiently low temperature so that when the second composition in its molten (liquid or fluid) state at substantially the melting point temperature is dispensed into the container little, if any, intermixing occurs at the interface between the two compositions.

In yet another embodiment, the melting point of the second composition may be higher than the first composition. The first composition is cooled to a temperature, lower than that disclosed above when the two compositions have substantially the same melting point,

before the second composition is dispensed into the container. The second composition, when dispensed into the container, is maintained at a temperature substantially equal to its melting point. The temperature of the first composition is selected to ensure design integrity with little, if any, mixing of the two compositions when the second composition is dispensed into the container at a temperature . Therefore, design integrity can be realized irrespective of whether the melting point of the two compositions is the same or different.

Preferably, one composition contains at least one colorant which is not contained in the other composition. In other words, in a preferred embodiment the first and second compositions differ in color. The term "color" is defined for the purpose of the description of this invention to include clear, transparent, opaque, as well as any other color, shade or tone of the color spectrum. Any number of two or more colors may be used as desired. In such an embodiment, the compositions form a discrete multicolor predetermined image, *i.e.*, an image including two or more colors. Preferably, the colorants are selected to provide good contrast and be eye catching. For example, the stick composition may contain a red composition and a green composition to form an image of a red heart with a green background. Attractive, traditional, holiday or national color combinations are well-known in the art and, though it is not limited to any particular combinations, desirable for the present invention.

The image may be, for example, a red heart on a white or pink field (the term "field" refers to the background, which is the stick composition encasing a specific image shape); a green evergreen tree on a red field; a yellow and purple ying-yang; a red or white 5-pointed star on a blue field; a yellow or white 6-pointed star on a blue field; a yellow sun on a blue field; a red circle on a white field; blue and orange half and half circle; a red heart with an arrow on a white field; pink and green lateral stripes; red and blue or white diagonal stripes (barber pole); red and green longitudinal stripes; a happy face on a yellow field; a sad face on a green or blue field; an orange tree on a brown field; a white crescent moon on a blue field; a red cross on a blue or white field; a white 4-pointed star on a blue field; a pink flower on a green field; a green ellipse on a yellow field; a white wave on a blue field; a yellow lightening bolt on a blue field; a yellow or pink pinwheel on a red, green, or blue field; a green flag on a white field; red lips on a white, pink, or brown field; one or more alphanumeric letters; any other geometric shape, such as a polygon; or any combination of the foregoing.

The only constraint on the number of colors and design pattern selected is that of the size of the container and the desire to maintain the different color compositions discrete from each other so as to substantially prevent mixing at the interface between colors and maintain the integrity of the predetermined image.

5 Although, the first and second compositions contain colorants, the compositions preferably become transparent or translucent when swiped or applied onto a substrate. Typically, the compositions become transparent or translucent due to the thinness of the film formed or a property of the compositions.

Suitable colorants include, but are not limited to, those approved by the U.S. Food and Drug Administration for application to the skin and lips, such as FD&C colors and D&C colors. Examples of such colorants include, but are not limited to, Red-6 Ca, Red-6 sodium, titanium dioxide, red iron oxide, Red 21, and Red 27. Preferably, the colorants, such as white, yellow, red, and orange colorants, do not fade upon extreme sun exposure.

The colorant may also be a color changing agent. Color changing agents include
15 agents which change their color and spectroscopic properties in the visible light and/or ultraviolet spectra, or in response to other stimuli. Preferred color changing agents include, but are not limited to, those which change their color in the visible light spectrum. Color changing agents may be activated by, for example, moisture and pH. For example, a color changing agent may exhibit one color in a moisture-free environment and a second color when
20 in contact with water. The color changing property of the agent may be reversible or irreversible, *i.e.*, the color changing agent may or may not revert back to its original color after being activated and deactivated. Preferably, the color changing agent reverts back to its original color after activation and deactivation. When a color changing agent is activated, a multi-colored predetermined reproducible image appears, disappears, or changes color. The
25 image may be any of the aforementioned images. Color changing agents which are included in stick compositions intended for topical application typically are non-toxic to the skin and safe to digest.

Suitable color changing agents which are moisture and/or pH activated, include but are not limited to, D&C Red 21, D&C Red 27, and any combination of any of the
30 foregoing.

The stick composition may be a composition intended for topical application to a person, such as a lip balm, lipstick, lip gloss, deodorant, or sunscreen, or other composition, such as a glue stick. The stick composition is sufficiently solid to substantially retain its shape when advanced or ejected from the container.

5

Lip Balms

Generally, lip balm stick compositions for topical application comprise a wax or other pharmaceutically acceptable vehicle and, optionally, one or more medicaments and/or adjuvants. Suitable waxes include, but are not limited to, petrolatum wax; carnauba wax; 10 paraffin wax; white wax; candelilla wax; beeswax; oils, such as arachidyl propionate, cetyl alcohol, isopropyl lanolate, isopropyl myristate, lanolin, mineral oil, light mineral oil, octyldodecanol, oleyl alcohol, ethyl macadamiate, castor oil, jojoba esters, hydrogenated castor oil, hydrogenated vegetable oil, cetyl ricinoleate, propylene glycol, isopropyl palmitate, stearyl alcohol, and volatile and non-volatile silicone oils; and any combination of any of the 15 foregoing. Suitable silicone oils include, but are not limited to, polyphenylmethyl siloxane, dimethicone, cyclomethicone, and any combination of any of the foregoing.

Suitable minor components include, but are not limited to, sunscreens (which will also be found in a sunscreen stick), such as octyl methoxycinnamate, octyl dimethyl p-aminobenzoate, actinoquinol, p-aminobenzoic acid, butyl methoxydibenzoylmethane, beta- 20 carotene, 4-dimethylamino benzoic acid, dioxybenzone, drometrizole, lawsone, sulisobenzene, titanium dioxide, and zinc oxide; preservatives, such as parabens, including but not limited to, methylparaben, isopropylparaben, and isobutylparaben; flavorants; fragrances; colorants, such as beta-carotene; conditioners, such as skin conditioning agents, including but not limited to, the aforementioned waxes and oils, especially petrolatum, dimethicone, and 25 polymethylsiloxane; moisturizers; emollients; cleansing agents; antioxidants, such as tocopherol; antistatic agents, such as cocamidopropyl PG-dimonium chloride; stabilizers; and pH adjusters, such as sodium hydroxide and hydrochloric acid. Preferably, each such component is approved for use in or on humans by the Food and Drug Administration, or corresponding regulatory bodies in other regions or countries.

Suitable lip balm stick bases for the first and second compositions are shown in Tables 1-6 below.

Table 1: Exemplary Lip Balm Formulation Compositions 1 and 2

Component	Lip Balm Formulation 1 (% w/w)	Lip Balm Formulation 2 (% w/w)
White Petrolatum USP	45.8	45.2
Arachidyl Propionate	3	3
Camphor	0.8	0.8
Carnauba Wax	1	1
Lanolin	5	5
Light Mineral Oil	15	15
Octyldodecanol	5	5
Oleyl Alcohol	-	2
Paraffin Wax	20.4	20.5
White Wax	2	2
Chapstick Color Mix D&C Red #6 Barium Lake	0	0.25
Flavor	2	0.25

Using formulation 1 as the first composition, and formulation 2 as the second composition, two color lip balm designs can be prepared as described above. Moreover, the lighter colored composition (formulation 1) has more flavor.

Table 2: Lip Balm Formulation Composition 3

Component	% w/w
Vegetable Oil, Hydrogenated Vegetable Oil, and/or Candelilla Wax	73.2
Hydrogenated Vegetable Oil	13
Shea Butter Extract	2

Beeswax	7.8
Carnauba Wax	3.8
Flavor	0.02

5

Table 3: Lip Balm Formulation Composition 4

10

15

20

Component	%w/w
Ethyl Macadamiate	20
Jojoba Esters	1
Carnauba Wax	5.1
Candelilla Wax	5.1
Beewax	3
Hydrogenated Castor Oil	1
Cetyl Ricinoleate	2
Isopropylparaben, Isobutylparaben, and/or Butylparaben	0.1
Titanium Dioxide and/or Hybrid Sunflower Oil	3
Beta-carotene (30%)	0.03
Octyl Methoxycinnamate	5
Tocopherol	0.5
Flavor	2
Castor Oil	qs

Table 4: Lip Balm Formulation Composition 5

	Component	% w/w
5	Dimethicone NF	2
	Cetyl Alcohol NF	6
	Silicon Dioxide NF	0.2
	Cyclomethicone	7
	Colorant	0.15
10	Hydrogenated Polyisobutene ¹	10
	Isocetyl Sterate	20.4
	Methylparaben NF	0.1
	Microcrystalline Wax	25
	Propylparaben NF	0.1
15	Vitamin A Palmitate USP	0.1
	Vitamin E Acetate USP	1
	Regent Petrolatum USP	27
	Aloe Vera Oil-Filtered	1

¹ - Hydrogenated Polyisobutene is available as Panalane H-300 from Amoco Chemical Co. of Chicago, IL.

Table 5: Lip Balm Formulation Composition 6

	Component	% w/w
	Petrolatum Penreco Amber USP	45
	Arachidyl Propionate	3
5	Carnauba Wax	1
	Cocoa Butter NF	5
	Isopropyl Lanolate	1.5
	Mineral Oil Light NF	14
	Octyldodecanol NF	4.5
10	Oleyl Alcohol	1.75
	Wax Paraffin	21.75
	White Wax NF	2.5

² - Polyphenylmethylsiloxane is available as Dow Corning 556 fluid from Dow Corning of Dow
 15 Chemical USA of Midland, MI.

Table 6: Lip Balm Formulation Composition 7

Component	% w/w
White Wax	2
Carnauba Wax	1
Isopropyl Myristate	1
Wax Paraffin	22
Oxybenzone	3.5
White Petrolatum	42
Isopropyl Lanolate	1.8
Octyl Methoxycinnamate	7.5
Octyldodecanol	4.7
Light Mineral Oil	12
Flavor	2.5

- 15 Other suitable lip balm bases for the first and second compositions include, but are not limited to, those described in *Cosmetic and Toiletry Formulations*, Cosmetic and Toiletry, Vol. 1, pp. 166, 488-489 (1989), which are herein incorporated by reference.

Sunscreen Sticks

- 20 The sunscreen stick compositions of the invention are analogous to the lip balm compositions. However, sunscreen sticks may use different waxes and active ingredients.

Suitable waxes for sunscreen compositions include, but are not limited to, the waxes for lip balms above.

- 25 The sunscreen composition will include a sunscreen, such as octyl methoxycinnamate, octyl dimethyl p-aminobenzoate, actinoquinol, p-aminobenzoic acid, butyl methoxydibenzoylmethane, beta-carotene, 4-dimethylamino benzoic acid, oxybenzone, dioxybenzone, drometrizole, lawsone, sulisobenzene, titanium dioxide, zinc oxide, and any combination of any of the foregoing. Suitable sunscreens and their absorbance ranges and approved concentrations are shown in Table 7 below.

Table 7: Sunscreen Ingredients

	Component	Absorbance Range (nm)	Approved Concentration (% w/w)
5	Amino benzoic acid	260-313	5-15
	Glyceryl aminobenzoate	264-315	2-3
	Padimate O	290-315	1.4-8
	Ethyl 4-[bis(hydroxypropyl)] aminobenzoate	280-330	1-5
	Methyl anthranilate	260-380	3
10	Dioxybenzone	260-380	3
	Oxybenzone	270-350	2-6
	sulisobenzene	260-375	5-10
	Cinoxate	270-328	1-3
	Diethanolamine methoxycinnamate	280-310	8-10
15	Octyl methoxycinnamate	290-320	2-7.5
	Octocrylene	250-360	7-10
	Avobenzone	320-400	3
	Octyl salicylate	280-320	3-5
	Homosalate	295-315	4-15
20	Trolamine salicylate	260-320	5-12
	Digalloyl trioleate	270-320	2-5
	Lawsone with dihydroxyacetone (DHA)	290-400	0.25 (Lawsone), 3 (DHA)
	Phenylbenzimidazole sulfonic acid	290-320	1-4
	Red petrolatum	290-365	30-100
25	Titanium dioxide	290-770	2-25
	Zinc oxide	~ 200-390	2-25

Preferred sunscreens include, but are not limited to, octyl methoxycinnamate and oxybenzone.

Preferred minor components of the sunscreen composition include a medicament; colorant; fragrance; and conditioner.

5

Stick Deodorants

The deodorant stick compositions of the invention are analogous to the lip balm and sunscreen compositions. However, deodorants use different waxes and active ingredients. Moreover, according to this aspect of the invention, a deodorant gel and "white" solid deodorant/antiperspirant can be used as the different compositions.

10

Typical compounds (high molecular weight hydrocarbons, alcohols, and acids) included in deodorant compositions include, but are not limited to, stearic acid, stearyl alcohol, propylene glycol, cyclomethicone, and any combination of any of the foregoing.

15

The deodorant compositions will also include one or more deodorants, such as (though not limited to) cocamidopropyl PG-dimonium chloride phosphate, abietic acid, aluminum citrate, aluminum PCA, azadirachta indicia extract, chlorophyllin-copper complex, eugenia jambolana extract, farnesol, fermented vegetable extract, ginger lily (*Hedychium spicatum*) extract, α -glucan-oligosaccharide, mauritia flexosa extract, octoxyglycerin, salvia miltiorrhiza extract, sandalwood (*Santalum album*) extract, sodium aluminum chlorohydroxy lactate, spondias amara extract, triethyl citrate, zinc phenolsulfonate, zinc ricinoleate, and any combination of any of the foregoing. They may also, or alternatively, contain one or more anti-perspirants, including, but not limited to, allantoin-aluminum chlorohydrate, aluminum capryloyl hydrolyzed collagen, aluminum chlorhydrex GLY, aluminum chloride, aluminum chlorohydrate, aluminum chlorohydrex, aluminum PCA, aluminum sesquichlorohydrate, aluminum undecylenoyl collagen amino acids, aluminum zirconium pentachlorohydrate, aluminum zirconium tetrachlorohydrate, aluminum zirconium tetrachlorohydrex GLY, aluminum zirconium trichlorohydrate, aluminum zirconium pentachlorohydrate, sage (*Salvia officinalis*) extract, tormentil (*Potentilla erecta*) extract, zirconium chlorohydrate, and any combination of any of the foregoing.

20

25

30

Preferred minor components of the stick deodorant composition include a medicament; colorant; fragrance; and conditioner.

Suitable deodorant formulations for the first and second compositions are shown in Tables 8 and 9 below.

Table 8: Deodorant Formulation 1

	Component	% w/w
5	Stearic Acid	8
	Ethanol	73.6
	Propylene Glycol	10
	Isopropyl Palmitate	5
	Cocamidopropyl PG-dimonium Chloride Phosphate	1
10	Sodium Hydroxide (50%)	2.4

Table 9: Deodorant Formulation 2

	Component	% w/w
	Cyclomethicone	45
15	Stearyl Alcohol	19
	Dimethicone	5
	Aluminum Zirconium Tetrachlorohydrate GLY	22
	Talc	4
	Mineral Oil	2
20	Hydrogenated Castor Oil	3
	Fragrance	qs

Glue Sticks

Generally, glue sticks comprise an adhesive. Suitable adhesives include, but are not limited to, starches; dextrans; cellulose ethers, such as methyl cellulose and carboxymethyl cellulose; starch ethers; and any combination of any of the foregoing. Glue sticks may further comprise binders, such as poly(vinyl pyrrolidone), and minor ingredients. Examples of suitable

adhesive stick formulations are described in U.S. Patent Nos. 5,371,131; 5,433,775; and 5,965,657.

Manufacturing Methods and Systems

5 By way of example, the systems and method for manufacturing the multi-composition stick product in accordance with the present invention will now be described in detail for a specific embodiment of a multi-composition stick product wherein the image is a heart. The heart shaped image in Figures 3a-3d is different than that shown in Figures 1a-1d in that the sides are curved instead of straight. An example nozzle fill system in accordance
10 with a first embodiment of the present invention, is shown in Figures 3a-3d, for filling a single container. The nozzle fill system includes a container or housing 100 and one or more filling nozzles 110. Container 100 preferably has a container screw 105 projecting upwards from its bottom and a lip 107. The container screw 105, when rotated, advances the composition through the open end of the container 100. Alternatively, a container shaft projecting from a
15 false bottom may be placed in the bottom of the container, whereby a mechanical force imposed on the false bottom advances the stick composition from the open end of the container. The use of a container shaft or container screw may be eliminated altogether, whereby the stick composition is advanced through the open end of the container by imposing a force on a false bottom of the container.

20 In the example shown in Figures 3a-3d, the container 100 has a cylindrical outer contour and a cylindrical inner contour. One or more nozzles 110 are used, in series, to fill the container 100 with the stick composition. The nozzle 110 includes a mold shaft 115 fixedly connected to an outer barrier or shield 120 having an inlet nozzle 125 connected to a supply source through which the first composition in a liquid state is received, as shown in Figure 3b.
25 Mold shaft 115, is preferably concentric with and extends beyond the outer barrier 120 in a longitudinal direction. In Figure 3a, the exemplary mold shaft 115 has an outer contour in the shape of a heart. Mold shaft 115 may be solid, semi-hollow, or hollow. The term "semi-hollow" is defined as a shaft which is divided in a longitudinal direction into a hollow lower portion to be inserted into the container and a solid upper portion. Preferably, the mold shaft

115 is hollow or semi-hollow so as to receive the container screw, when inserted into the container 100.

Operation of the nozzle filling system shown in Figures 3a-3d will now be described in detail. First, in Figures 3a and 3b, the mold shaft 115 is inserted into the container 100. Mold shaft 115 may be inserted so that it contacts the closed end of the container 100 or, alternatively, may be inserted only into a portion of the container, *e.g.*, halfway. As shown in Figure 3b, a first composition in a liquid state (generally realized by heating the composition) is dispensed from the inlet nozzle 125 into a passageway, formed between the inner surface of the outer barrier 120 and outer surface of the mold shaft 115, and drips or flows into an outer region or area of the container 100 around the mold shaft 115. After filling the outer region or area a desired amount, for example, to the top of the container, the first composition is allowed to cool and solidify. Then the mold shaft 115 of the filling nozzle is removed from the container 100 leaving a solid outer region having an inner cavity 130 complementary in shape to that of the mold shaft, as shown in Figure 3c. In the example shown in Figures 3a-3d, mold shaft 115 is hollow. The same filling nozzle 110 may therefore be used to fill the container 100 with both the first and second compositions. In Figure 3a, a second supply source of the second composition in a liquid state is dispensed, either directly or indirectly via the top opening of the mold shaft 115, into the cavity 130 in the container formed by removal of the mold shaft. A top view of the filed container with the first and second compositions is shown in Figure 3d. Finishing techniques, such as scraping or glazing, of the top surface of the composition stick may be performed after the container has been filed.

In an alternative configuration, wherein a solid or semi-hollow mold shaft 115 is used in accordance with the nozzle filling method described above, the second composition can not be dispensed through the top opening of the mold shaft 115. Therefore, with this arrangement a second filling nozzle having a hollow mold shaft may be used to fill the inner cavity 130 of the container with the second composition, or the second composition may be dispensed directly into the cavity of the container. After filling, the second composition is dispensed into the cavity it may be cooled by generating an air flow in the inlet nozzle.

Figures 3a-3d show only a single container or housing 100 being filled.

Figure 5 is an exemplary nozzle fill system 500 for simultaneously manufacturing a plurality of containers using the steps in Figures 3a-3d. By way of example, Figure 5 shows four containers 100 each having an associated filling nozzle 110. The system can be modified, as desired, to simultaneously fill any number of containers. An array or plurality of containers are inserted in respective holes 515 of a supporting tray 505. A holding member 510 is capable of supporting an array or plurality of interchangeable filling nozzles via releaseable locking devices 520, such as a pin, clip or clamp. The arrangement of the holes 515 in the supporting tray 505 mirrors the arrangement of the releaseable locking devices 520 in the holding member, so that when the filling nozzles are installed and the holding member 510 is properly aligned with respect to the supporting tray 505, each of the filling nozzles is disposed above a container to be filled. The holding member 510 may be assembled with all, or less than all, of the available releaseable locking devices 520 receiving a filling nozzle, as desired. In addition, all or some of the plural filling nozzles inserted into the releaseable locking mechanisms may be the same or different. The system shown in Figure 5 may be assembled so that less than all of the holes 515 receive containers. Operation of the system is the same when manufacturing a plurality of multi-composition stick products, as that described above in Figures 3a-3d with respect to a single multi-composition stick product.

An exemplary alternative configuration of the nozzle fill system is shown in Figure 4a. This embodiment is similar to that shown in Figure 3a except that instead of the mold shaft 115 extending in a longitudinal direction beyond the terminating ends of the outer barrier 120, in Figure 4a, the mold shaft 115' and outer barrier 120' are substantially equal in length. In operation the filling nozzle is inserted into the container, as shown in Figure 4a. Thereafter, first and second compositions are simultaneously dispensed through the filling nozzle 110' as it is being raised from the container. Specifically, the first composition is dispensed through the inlet nozzle 125' while the second composition is dispensed through the top opening of the mold shaft 115'. The final image will be a heart shape with intermixing between the colors at the interface between two compositions.

A third embodiment of an exemplary nozzle fill method for manufacturing a multi-composition stick product in accordance with the present invention is shown in Figures 6a-6e. Initially, in Figures 6a and 6b, the first composition is dispensed, for example, using

an input nozzle 705, so as to partially fill the container 710 while leaving an air space 720 between the exposed surface of the first composition and the open end of the container. While the first composition is in a liquid state, a mold shaft 725 is inserted into a portion of the container 710 (Figure 6c), thereby causing the first composition to be displaced and thus, rise in level in the container 710. Mold shaft 725 may be solid or have a closed end that when inserted into the container 710 causes the first composition to be displaced by and around the mold shaft 725. After the first composition has solidified, the mold shaft 725 is removed, thereby forming or leaving a cavity 730, as shown in Figure 6d. The second composition in a liquid state is dispensed into the cavity 730, in Figure 6e. Glazing or other finishing techniques may be performed on the top surface of the multi-composition stick.

Figures 7a-7d show a fourth embodiment of an exemplary nozzle fill method for manufacturing a multi-composition stick product in accordance with the present invention. In Figures 7a and 7b, a mold shaft 805 is inserted into at least a portion of the container 815 and the first composition is dispensed either directly or indirectly, for example, using a filling nozzle 820, into the container 815 and around the mold shaft 805. The mold shaft 805 may be solid or have a closed end. After the first composition has cooled and solidified, the mold shaft 805 is removed from the container 815, thereby forming a cavity 825, as shown in Figure 7c. In Figure 7d, a second composition is then dispensed into the cavity 825.

A multi-nozzle system for simultaneously dispensing two or more compositions into a container may be used to create desired patterns in accordance with the present invention. Preferably, each nozzle dispenses a composition at a temperature just above melting temperature. An exemplary dual-nozzle system is shown in Figures 8a and 8b. The system includes a first nozzle 705 and a second nozzle 710 connected together by a securing mechanism 715, such as a releaseable ring. The first nozzle 705 has an inlet 721 for receiving a first composition 720 in a liquid state, while the second nozzle 710 receives a second composition 725 in a liquid state through a second inlet 726. In operation the nozzles are assembled together by placing the securing mechanism around both devices, and the assembly is then inserted into the container 730, as shown in Figure 8a, so that the container screw 735 is received in the recess 740 (Figure 8c). The first and second compositions 720, 725 are simultaneously dispensed through their respective inlets 721, 726 and nozzles 705, 710 into the

container 730 as the assembly is being withdrawn from the container, as shown in Figure 8b. If the assembly and container are kept stationary, the pattern created is a semicircle. However, if either the assembly or container is rotated with respect to the other, then the design created is that of a spiral shape with intermixing between the colors at the interface between the two compositions. Although this multi-nozzle system has been shown using two nozzles, any number of two or more nozzles may be used. A variety of designs may be produced, such as a circle divided into an even number of wedges, a pinwheel, or a spiral, depending on such factors as the number and shape of the nozzles selected, whether the nozzle or container is rotated with respect to the other, and the angle or degree of rotation. Because the two compositions are dispensed from the mold shafts simultaneously, intermixing between the two compositions will occur at the interface between the two compositions.

Another embodiment for manufacturing the multi-composition stick product in accordance with the present invention is referred to as the flood fill method. An example flood fill system for simultaneously manufacturing an array or plurality of multi-color stick products is shown in Figures 9a-9f. A tray 300 has one or more openings 305 defined therein, each opening is sized to receive a container or housing 310 therein. Although eight openings and associated containers are shown in Figures 9a-9f, the system may be modified to accommodate any number of openings and containers, as desired. Typically, an array of 10 x 20 containers is used. The containers 310 are passed through the openings 305 in the tray 300 until the open end of the container is substantially flush with or recessed relative to the upper surface of the tray. After the containers 310 have been placed in the respective openings 305, a mold shaft 315 is inserted into each of the containers. In Figure 9d, the mold shaft 315 is inserted so that it contacts the closed end of the container 310 and a portion of the mold shaft projects above the surface of the tray 300. Alternatively, the mold shaft may be inserted into only a portion of the container, e.g. halfway, so that it does not contact the closed end of the container. Mold shaft 315 has any desired shape, such as a heart, as shown. After inserting the mold shaft 315 into the container a valve 335 is opened, as shown in Figure 9d, and a first composition 320 in a liquid state is poured onto the tray 300, whereby the liquid spills into and fills the container around the mold shaft 315. Once the inner composition cools and solidifies the mold shaft 315 is removed from the container 310 thereby forming a cavity 323 complementary in shape to that

of the mold shaft, as shown in Figure 9e. A second valve 325 is then opened to dispense a second composition 327 in a liquid state onto the tray 300, whereby the liquid spills into and fills the inner cavity left by the mold shaft 315. The top surface of the stick product may be finished, for example, may be scraped using a heated scraper or glazed, without mixing of the first and second compositions. In a preferred embodiment the excess composition is removed, e.g., scraped, from the support tray 300 after the container has been filled with both the first and second compositions. This is disadvantageous, however, in that the excess scrapings from the support tray may not be recycled because the two compositions have formed a mixture. Alternatively, the excess composition may be scraped from the surface of the support tray after the first composition has been dispensed into the container, but before the second composition is dispensed into the container. This alternatively embodiment has the drawback that the scrapings of the first composition may inadvertently be thrown into the cavity form in the container by the first composition. Mold shaft 315 preferably has a relatively small hole defined longitudinally therethrough to relieve air pressure by allowing the air to escape through the hole. thereby making removal of the mold shaft easier. A valve disposed at the top of the hole is closed during filling and opened when the mold shaft is removed from the container.

The flood fill system shown in Figures 9a-9f may be modified so as to simultaneously manufacture a plurality of multi-composition stick products. A plurality or array of mold shafts 315 are arranged on a support, similar to the holding member 510 shown in Figure 5, with each mold shaft disposed substantially centered above an associated stick composition container 310. For example, an array of mold shafts can be arranged for insertion into lip balm containers. All of the mold shafts in the array can be of the same shape. In another embodiment, mold shafts in a given row or column of the array may have the same shape as one another but differ from row to row or column to column. Still another embodiment may have the mold shafts randomly distributed so that each mold shaft is different from all others. Alternatively, the first composition may be dispensed into the container and then the mold shaft may be inserted therein while in a liquid state. Once the first composition has cooled and solidified, the mold shaft is removed to leave or form a cavity that can later be filled with a second composition.

In the fill systems described above, the mold shaft 115, 315 is preferably designed to receive the container screw or shaft 105, if present. Also, the mold shaft 115, 315 is preferably tapered, *e.g.*, about 0.1° , with the wider end disposed towards the open end of the container. The taper facilitates removal of the mold shaft after dispensing the first composition by breaking any vacuum as soon as the mold shaft is removed. Tapering is also advantageous in the nozzle apparatus.

The nozzle fill methods provide better control in filling the container than the flood fill methods.

A multi-composition stick product in accordance with the present invention may be manufactured using a combination of the nozzle fill and flood fill techniques. For example, the container may be filled with the first composition using the nozzle fill technique, and then the second composition may be dispensed into the container using the flood fill technique, or vice versa. It should also be noted that the different compositions may be arranged to form more than one predetermined image in a longitudinal direction of the multi-composition stick product. For instance, the container may be filled with a stick composition in which a first multi-color image in the lower half of the container is a heart surrounded by a circle, while a second multi-color image in the upper half of the container is a broken heart surrounded by a circle. The methods of manufacture described above may be performed while the container is oriented in a vertical direction or may be tilted at a predetermined angle. For example, diagonal stripes may be formed by tilting the angle of orientation of the container.

To achieve a multi-composition stick product having a barber pole striped appearance, a mold shaft 700 in the shape of a cork screw may be used, such as that shown in Figures 10a-10d. In Figure 10a, the cork screw shaped mold shaft 700 is inserted into so that it contacts the closed end of the container 705. Alternatively, mold shaft 700 may be inserted partially, *e.g.* halfway, into the container 705. In Figure 10b, a first composition 710 in a liquid state is dispensed through a first filling nozzle 715 into the container. After the first composition 710 has cooled and solidified, the mold shaft 700 is rotated in a counter-clockwise direction and extracted from the container without removing or disturbing the first composition thereby leaving cavities 720, as shown in Figure 10c. Thereafter, in Figure 10d, the container is then filled with a second composition 725 dispensed from a second filling nozzle 730, using

either the nozzle fill or flood fill technique described above, and into the cavities 720. The realized pattern is that of a barber pole.

While stick products having two compositions are shown and described, it is within the intended scope of this invention for the stick product to include more than two
5 compositions.

Thus, while there have been shown, described, and pointed out fundamental novel features of the invention as applied to a preferred embodiment thereof, it will be understood that various omissions, substitutions, and changes in the form and details of the devices illustrated, and in their operation, may be made by those skilled in the art without
10 departing from the spirit and scope of the invention. For example, it is expressly intended that all combinations of those elements and/or steps which perform substantially the same function, in substantially the same way, to achieve the same results are within the scope of the invention. Substitutions of elements from one described embodiment to another are also fully intended and contemplated. It is also to be understood that the drawings are not necessarily drawn to scale,
15 but that they are merely conceptual in nature. It is the intention, therefore, to be limited only as indicated by the scope of the claims appended hereto. All patents, patent applications, procedures, and publications cited throughout this application are hereby incorporated by reference in their entireties.

Claims

What is claimed is:

- 1 1. A multi-composition stick product, comprising:
 - 2 (a) a container having walls, an exterior contour, and an interior contour; and
 - 3 (b) a molded stick composition disposed so as to contact the walls of the
 - 4 container and be advanceable in the container, the stick composition comprising:
 - 5 (i) a first composition; and
 - 6 (ii) a second composition;
 - 7 wherein the first and second compositions differ by at least one component and the
 - 8 compositions are arranged in a predetermined non-random pattern that is reproducible.
- 1 2. The multi-composition stick product in accordance with claim 1, wherein the interior
- 2 and exterior contours of the container are different.
- 1 3. The multi-composition stick product in accordance with claim 1, wherein the
- 2 component is a medicament, colorant, fragrance, flavorant, sunscreen, preservative,
- 3 conditioner, moisturizer, emollient, or surfactant.
- 1 4. The multi-composition stick product in accordance with claim 3, wherein the
- 2 component is a colorant.
- 1 5. The multi-composition stick product in accordance with claim 4, wherein the
- 2 compositions form a predetermined discrete multicolor image.
- 1 6. The multi-composition stick product in accordance with claim 5, wherein the image
- 2 is a heart; evergreen tree; ying-yang; 5-pointed star; 6-pointed star; sun; circle; half and half
- 3 circle; heart with an arrow; lateral stripes; diagonal stripes (barber pole); longitudinal stripes;
- 4 happy face; sad face; tree; crescent moon; cross; 4-pointed star; flower; ellipse; wave;

5 lightening bolt; pinwheel; flag; lips; one or more alphanumeric letters; any other geometric
6 shape; or any combination thereof.

1 7. The multi-composition stick product in accordance with claim 5, wherein the stick
2 composition has a longitudinal axis and for at least a portion thereof, each cross-section
3 perpendicular to the longitudinal axis of the composition contains the same multicolor image.

1 8. The multi-composition stick product in accordance with claim 1, wherein the stick
2 composition is for topical application to an animal in need thereof.

1 9. The multi-composition stick product in accordance with claim 8, wherein the stick
2 composition is lip balm, lipstick, lip gloss, sunscreen stick, or deodorant.

1 10. The multi-composition stick product in accordance with claim 8, wherein the stick
2 composition comprises a pharmaceutically acceptable vehicle.

1 11. The multi-composition stick product in accordance with claim 9, wherein the stick
2 composition further comprises a medicament, a sunscreen, a preservative, a flavorant, a
3 fragrance, a colorant, a conditioner, a moisturizer, an emollient, a cleansing agent, an
4 antioxidant, an antistatic agent, a stabilizer, a pH adjuster, a surfactant, or any combination
5 thereof.

1 12. A multi-color stick product, comprising:
2 (a) a container having walls; and
3 (b) a molded multi-color stick composition disposed so as to contact the walls
4 of the container and be advanceable in the container, the stick composition comprising:
5 (i) a first composition; and
6 (ii) a second composition;
7 wherein the first and second compositions differ in color and are arranged in a predetermined
8 non-random image that is reproducible.

1 13. The multi-color stick product in accordance with claim 12, wherein the stick
2 product is a lip balm.

1 14. A method for manufacturing a multi-composition stick product advanceable from
2 an open end of a container, the method comprising the steps of:
3 inserting a mold shaft into the container;
4 dispensing a first composition of stick composition into the container around the
5 mold shaft;
6 removing the mold shaft from the container to form a cavity; and
7 filling at least a portion of the cavity with a second composition of stick
8 composition, the first and second compositions differing by at least one component and being
9 arranged in a predetermined non-random pattern that is reproducible.

1 15. The method in accordance with claim 14, wherein the inserting step comprises
2 inserting a portion of a first filling nozzle into the container, the first filling nozzle including
3 a first mold shaft having a first predetermined shape and a first outer barrier disposed about at
4 least a portion of the first mold shaft.

5 16. The method in accordance with claim 15, wherein the dispensing step comprises
6 dispensing the first composition of stick composition into a passageway, defined between the
7 outer surface of the first filling nozzle and the inner surface of the first outer barrier, and into
8 the container around the mold shaft.

1 17. The method in accordance with claim 16, wherein the first mold shaft is hollow.

1 18. The method in accordance with claim 17, wherein the filling step comprises
2 dispensing the second composition of stick composition through the first mold shaft and into
3 the container so as to fill at least a portion of the cavity.

1 19. The method in accordance with claim 16, wherein the first mold shaft is solid or
2 semi-hollow.

1 20. The method in accordance with claim 19, wherein the filling step comprises
2 dispensing, using a second filling nozzle having a second hollow mold shaft of a second
3 predetermined shape, the second composition of stick composition into the second mold shaft
4 so as to fill at least a portion of the cavity.

1 21. The method in accordance with claim 14, wherein the dispensing step comprises
2 dispensing the first composition of stick composition into the container around the mold shaft.

1 22. The method in accordance with claim 14, further comprising the step of finishing
2 the top surface of the stick composition while disposed in the container.

1 23. The method in accordance with claim 22, wherein said finishing step comprises
2 scraping the top surface of the stick composition with a heated scraper.

1 24. The method in accordance with claim 22, wherein said finishing step comprises
2 glazing the top surface of the stick composition.

1 25. The method in accordance with claim 14, wherein the component is a medicament,
2 colorant, fragrance, flavorant, sunscreen, preservative, conditioner, moisturizer, emollient, or
3 surfactant.

1 26. The method in accordance with claim 25, wherein the component is a colorant.

1 27. The method in accordance with claim 26, wherein the first and second compositions
2 are arranged as a discrete predetermined non-random multi-color image that is reproducible.

1 28. The method in accordance with claim 27, wherein for at least a portion of the
2 composition stick, each cross-section in a direction perpendicular to the longitudinal direction
3 of the composition stick has the same image.

4 29. The method in accordance with claim 14, wherein substantially no mixing occurs
5 at the interface between the first and second compositions.

1 30. The method in accordance with claim 14, wherein the stick product is a lip balm.

1 31. The method in accordance with claim 14, wherein the dispensing step comprises
2 dispensing the first composition of stick composition onto a support tray by which the container
3 is held so that the first composition spills into the container around the mold shaft.

1 32. The method in accordance with claim 31, wherein the filling step comprises
2 dispensing the second composition of stick composition onto the support tray so that the second
3 composition spills into the container and fills at least a portion of the cavity.

1 33. The method in accordance with claim 32, wherein the removing step further
2 comprises finishing the top surface of the first composition.

1 34. The method in accordance with claim 14, further comprising the step of removing
2 excess first and second compositions from the support tray.

1 35. A method for manufacturing a multi-composition stick product advanceable from
2 an open end of a container, the method comprising the steps of:
3 dispensing a first composition of stick composition into the container;
4 inserting a mold shaft into the container so as to displace the first composition
5 therein;
6 removing the mold shaft from the container to form a cavity; and

7 filling at least a portion of the cavity with a second composition of stick
8 composition, the first and second compositions differing by at least one component and being
9 arranged in a predetermined non-random pattern that is reproducible.

1 36. A system for manufacturing a multi-composition stick product in a container having
2 an inner contour and an outer contour, the stick product including a stick composition
3 comprising a first composition and a second composition, the first and second compositions
4 differing by at least one component and being arranged in a predetermined non-random pattern
5 that is reproducible, comprising:

6 a filling nozzle comprising:

7 a mold shaft insertable into the container;

8 an outer barrier disposed about at least a portion of the mold shaft so as
9 to form a passageway between the outer barrier and the mold shaft for receiving the first
10 composition.

1 37. The system in accordance with claim 36, wherein the mold shaft is solid or semi-
2 hollow.

1 38. The system in accordance with claim 36, wherein the mold shaft is hollow.

1 39. The system in accordance with claim 36, wherein the inner and outer contours of
2 the container differ in shape.

1 40. The system in accordance with claim 36, wherein the outer barrier is a ring
2 disposed about the mold shaft.

1 41. The system in accordance with claim 36, wherein the mold shaft and the inner
2 contour of the container differ in shape.

1 42. The system in accordance with claim 36, wherein the mold shaft and the outer
2 barrier are of equal length in a longitudinal direction.

1 43. The system in accordance with claim 36, wherein the mold shaft extends beyond
2 the outer barrier in a longitudinal direction.

1 44. A system for simultaneously manufacturing a plurality of multi-composition stick
2 products in a plurality of containers, each stick product including a stick composition
3 comprising a first composition and a second composition, the first and second compositions
4 differing by at least one component and being arranged in a predetermined non-random pattern
5 that is reproducible, comprising:

6 a support tray having a plurality of holes defined therein for receiving the plural
7 containers;

8 a holding member; and

9 a plurality of interchangeable filling nozzles, each filling nozzle being secured
10 to the holding member by an associated releaseable locking member, and each filling nozzle
11 comprising:

12 a mold shaft insertable into an associated container;

13 an outer barrier disposed about at least a portion of the mold shaft so as
14 to so as to form a passageway between the mold shaft and outer barrier for receiving the first
15 composition.

1 45. The system in accordance with claim 44, wherein the releaseable locking member
2 is a pin, clip or clamp.

1 46. A multi-composition stick product prepared by the method of claim 14.

1 47. A system for manufacturing a multi-composition stick product in a container having
2 an inner contour and an outer contour, the stick product including a stick composition
3 comprising a first composition and a second composition, the first and second compositions

4 being dispensed simultaneously, differing by at least one component and being arranged in a
5 predetermined non-random pattern that is reproducible, comprising:
6 a first filling nozzle for dispensing the first composition;
7 a second filling nozzle for dispensing the second composition; and
8 a securing mechanism for connecting the first and second filling nozzles, the
9 assembled first and second filling nozzles being insertable into the container.

1 48. A method for manufacturing a multi-composition stick product using the system
2 in claim 47, wherein said filling nozzles and said container are rotated independently of one
3 another.

1 49. A system for manufacturing a multi-composition stick product advanceable from
2 a container, comprising:
3 a cork screw shaped mold shaft adapted so as to be received in said container.

1 50. A method for manufacturing a multi-composition stick product advanceable from
2 a container having an inner contour, comprising the steps of:
3 inserting a cork screw shaped mold shaft into the container, said mold shaft
4 including a plurality of spiral revolutions;
5 dispensing a first composition of stick composition into the container between
6 the spiral revolutions of the mold shaft;
7 rotating while removing the mold shaft from the container to form a spiral cavity
8 about a perimeter of the inner contour of the container; and
9 filling at least a portion of the spiral cavity with a second composition of stick
10 composition, the first and second compositions differing by at least one component and being
11 arranged in a predetermined non-random pattern that is reproducible.

Abstract

A multi-composition stick product, such as a lip balm, sun screen, deodorant, or glue stick. The multi-composition stick product including a stick composition molded in the container so as to contact the walls thereof and be advanceable or ejected therefrom. The stick composition includes a first composition and a second composition. The first and second compositions differ in at least one component, such as a medicament, colorant, fragrance, flavorant, sunscreen, preservative, conditioner, moisturizer, emollient, or surfactant. Furthermore the first and second compositions are arranged in a predetermined non-random pattern that is reproducible. Also described is the method and apparatus for manufacturing the multi-composition stick product.

06/30/04 528
4/13

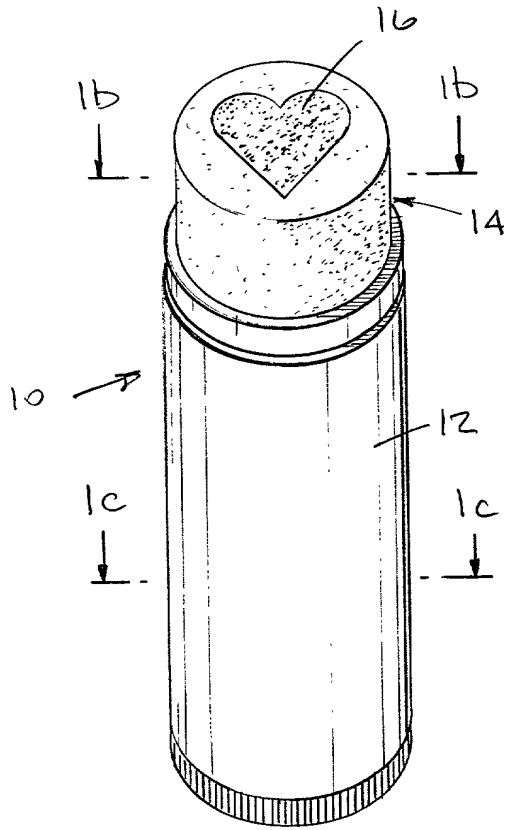


FIG. 1a




FIG. 1b

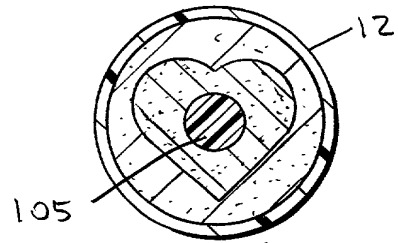


FIG. 1c

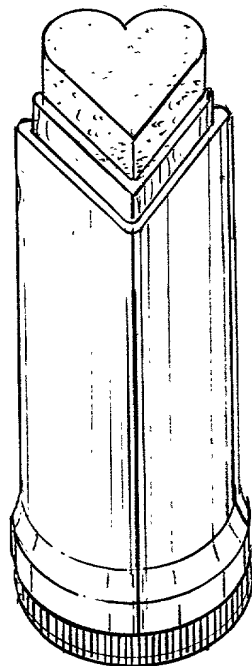


FIG. 1d

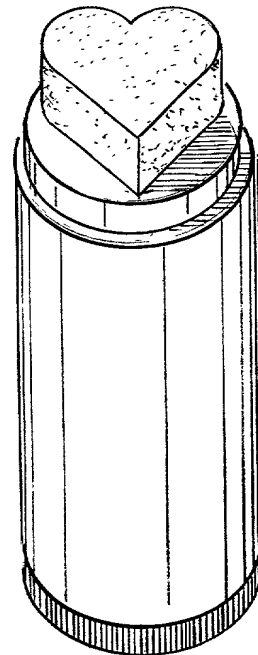


FIG. 1e

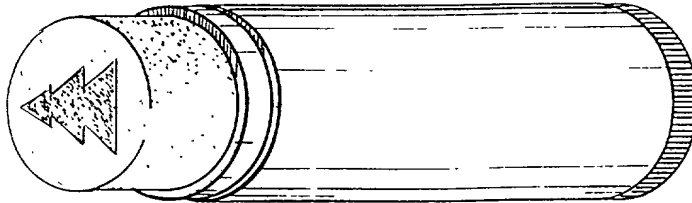


FIG. 2a

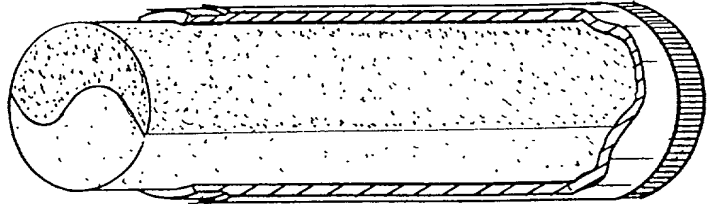


FIG. 2b

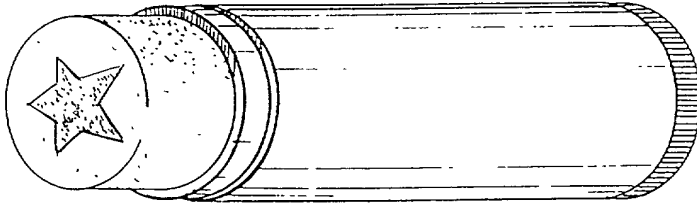


FIG. 2c

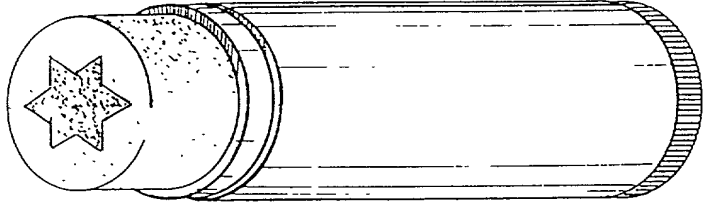


FIG. 2d

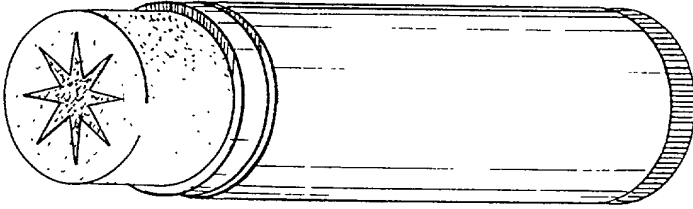


FIG. 2e

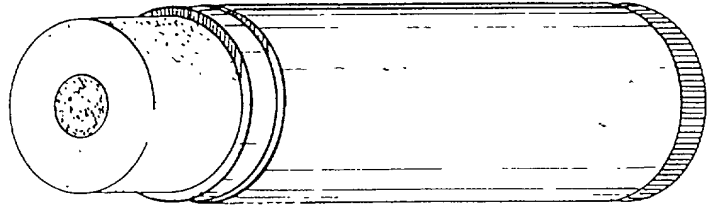


FIG. 2f

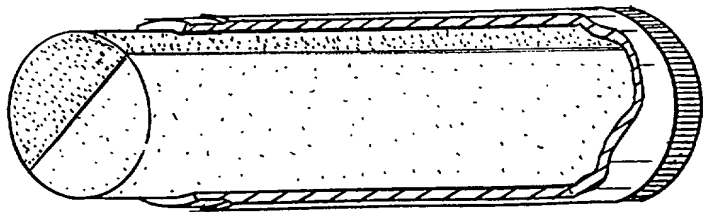


FIG. 2g

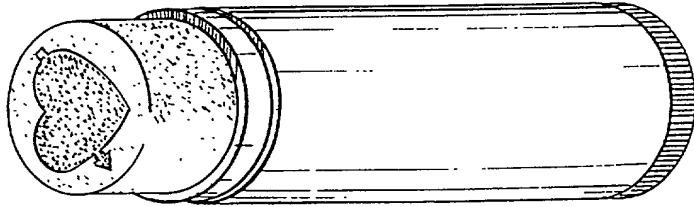


FIG. 2h

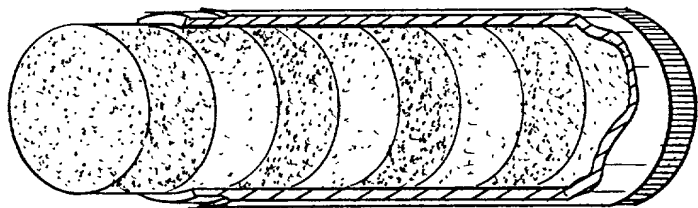


FIG. 2i

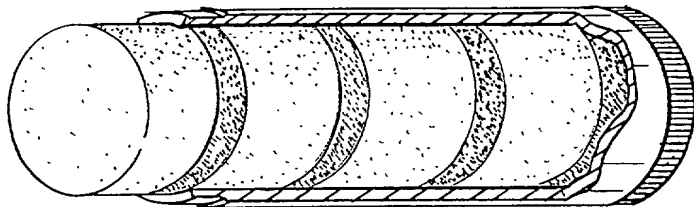


FIG. 2j

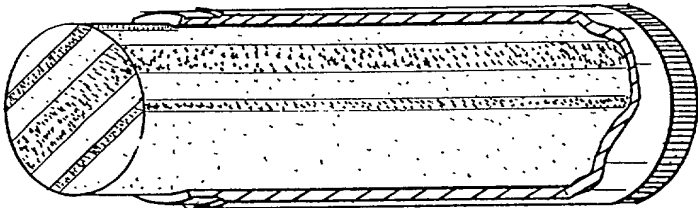


FIG. 2k

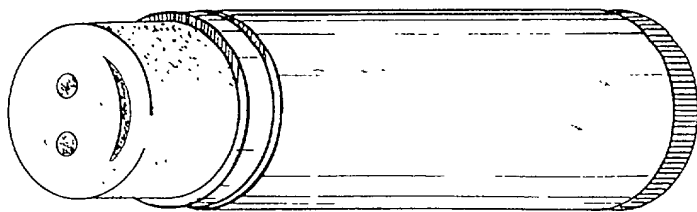


FIG. 2l

06/30/09 528
3/1/09

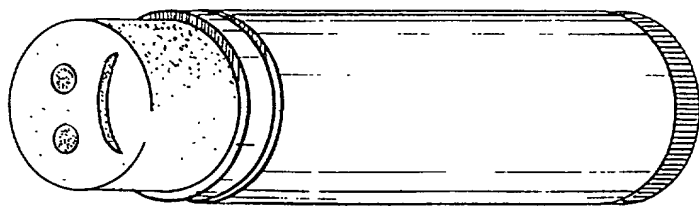


FIG. 2m

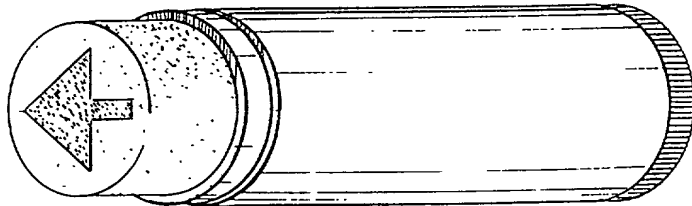


FIG. 2n

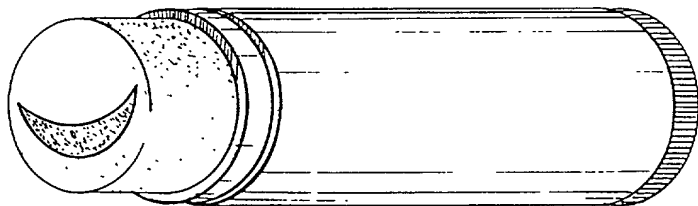


FIG. 2o

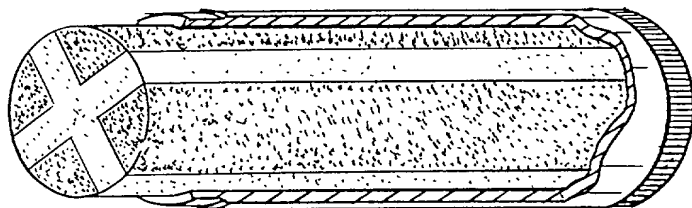


FIG. 2p

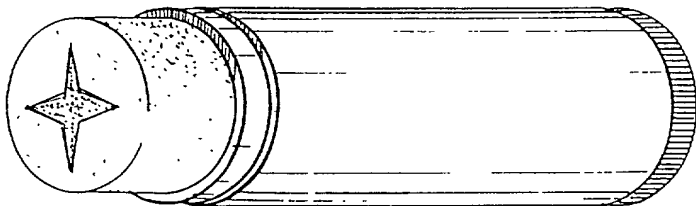


FIG. 2q

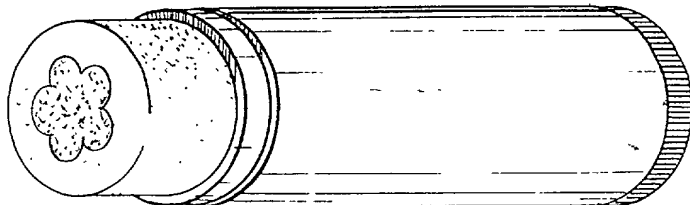


FIG. 2r

DI. 20/06528

0630/04528
5/12

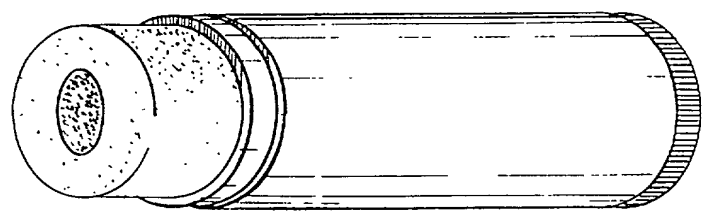


FIG. 2s

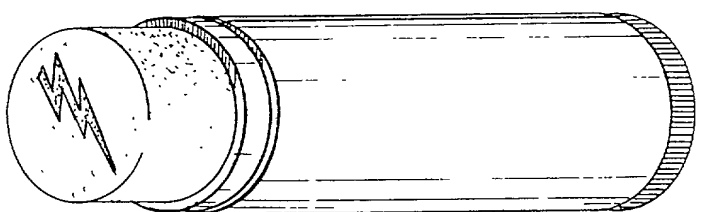


FIG. 2u

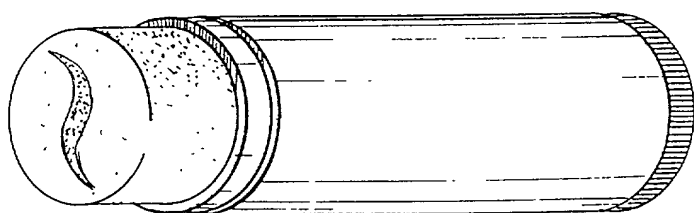


FIG. 2t

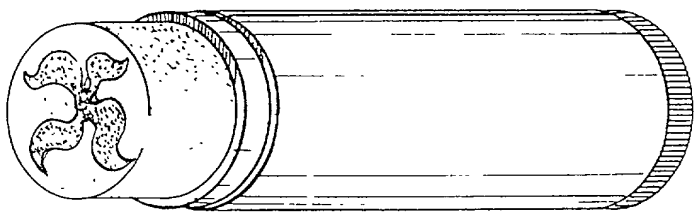


FIG. 2v

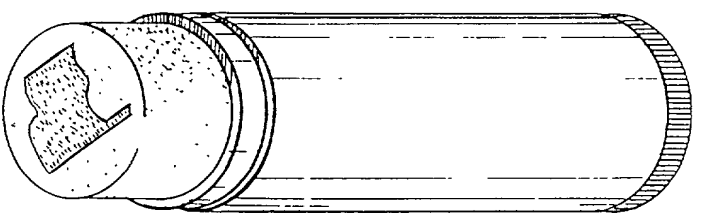


FIG. 2w



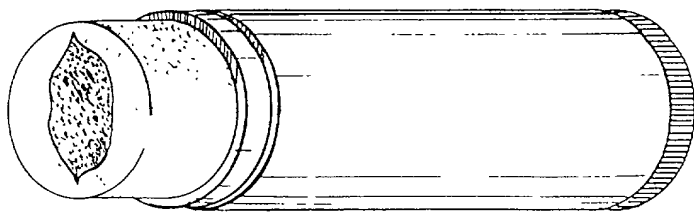


FIG. 2x

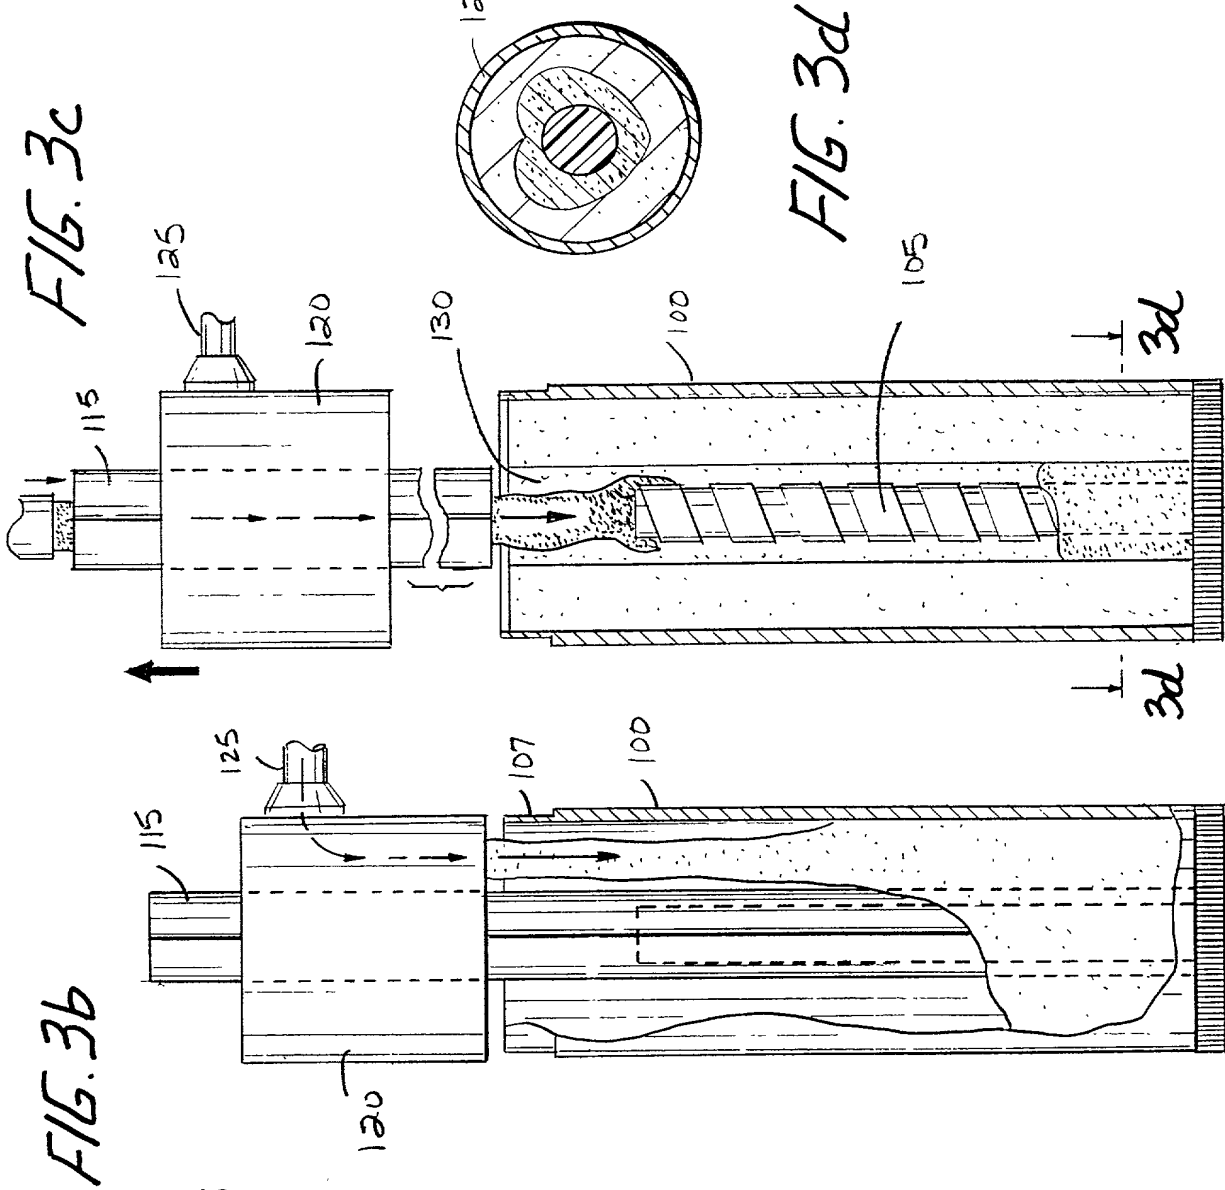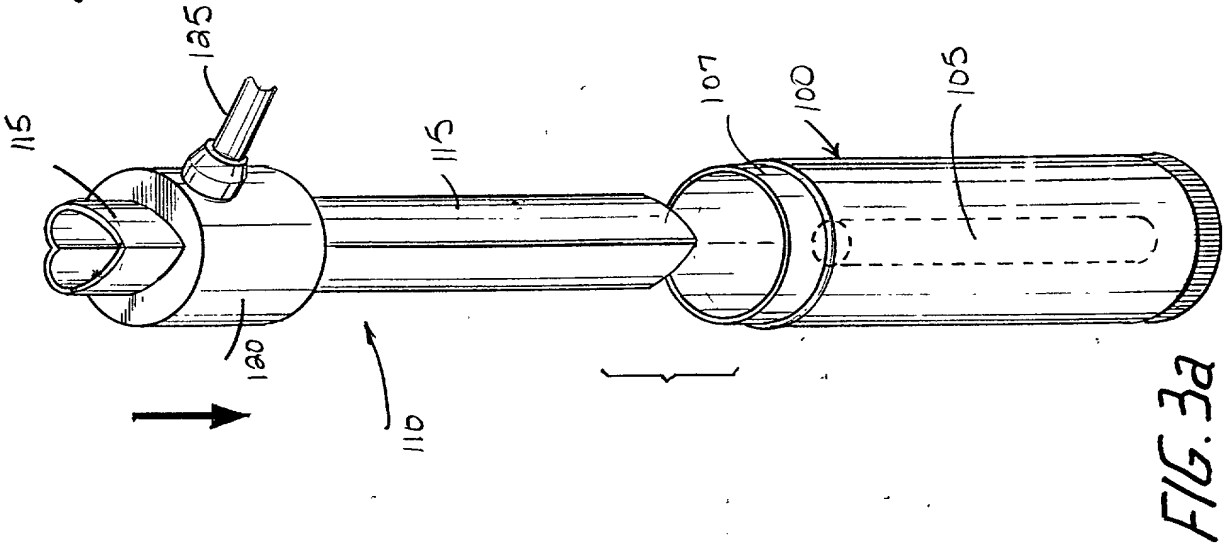

0630/04528
6/19

0630106528
7/13

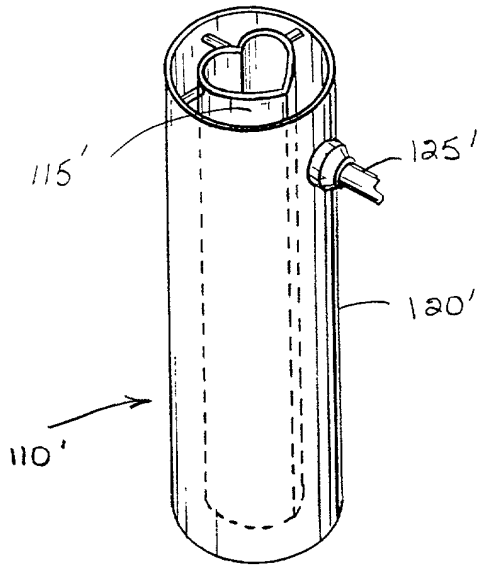


FIG. 4a

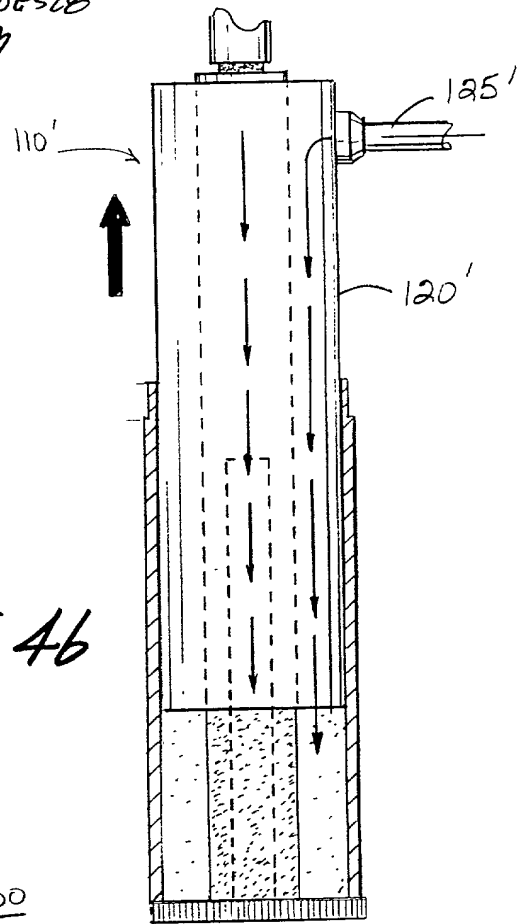


FIG. 4b


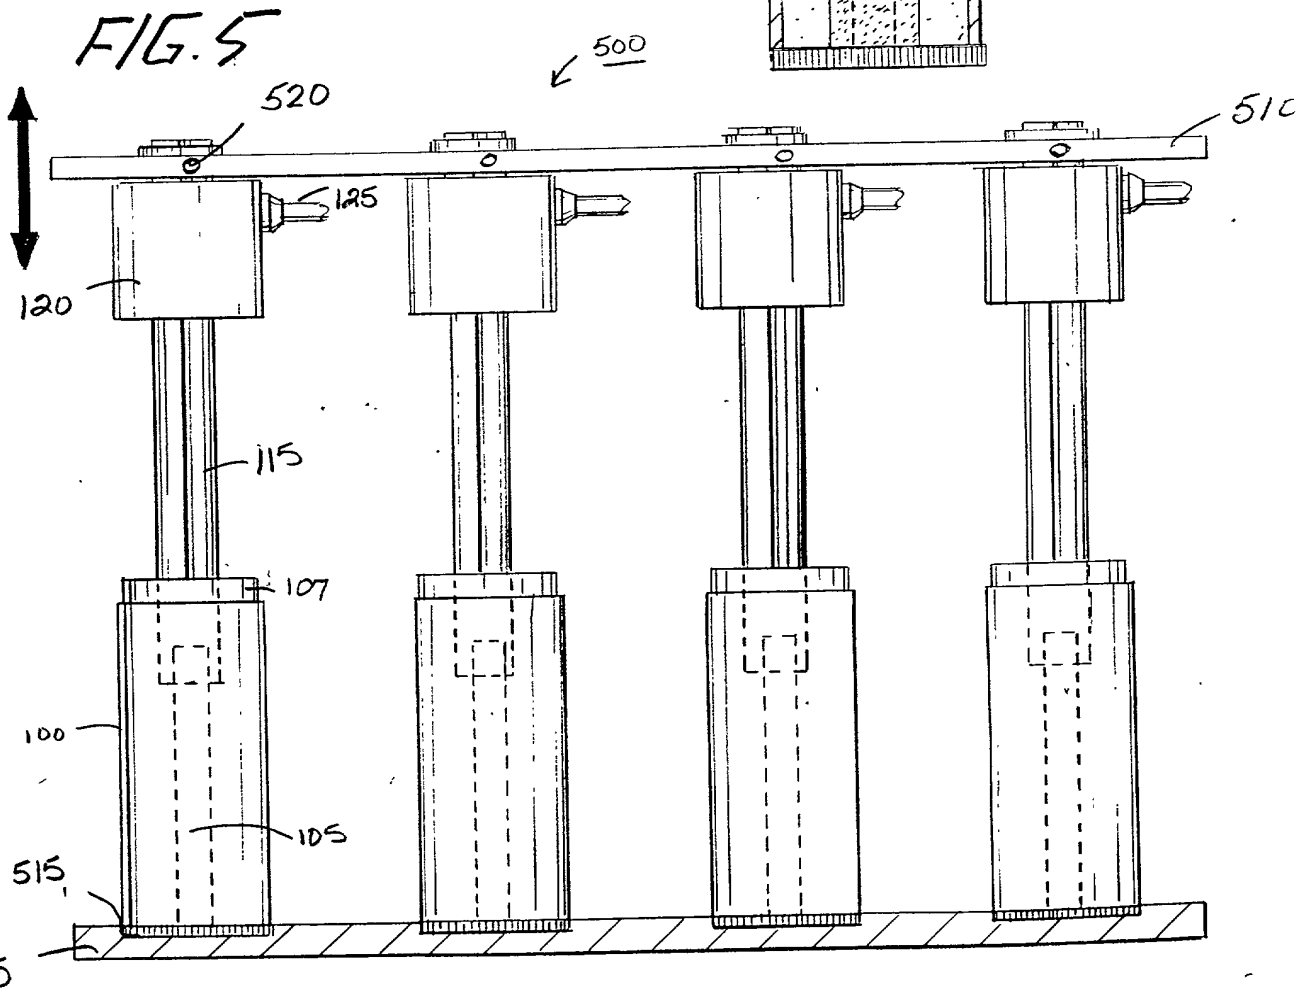


FIG. 5

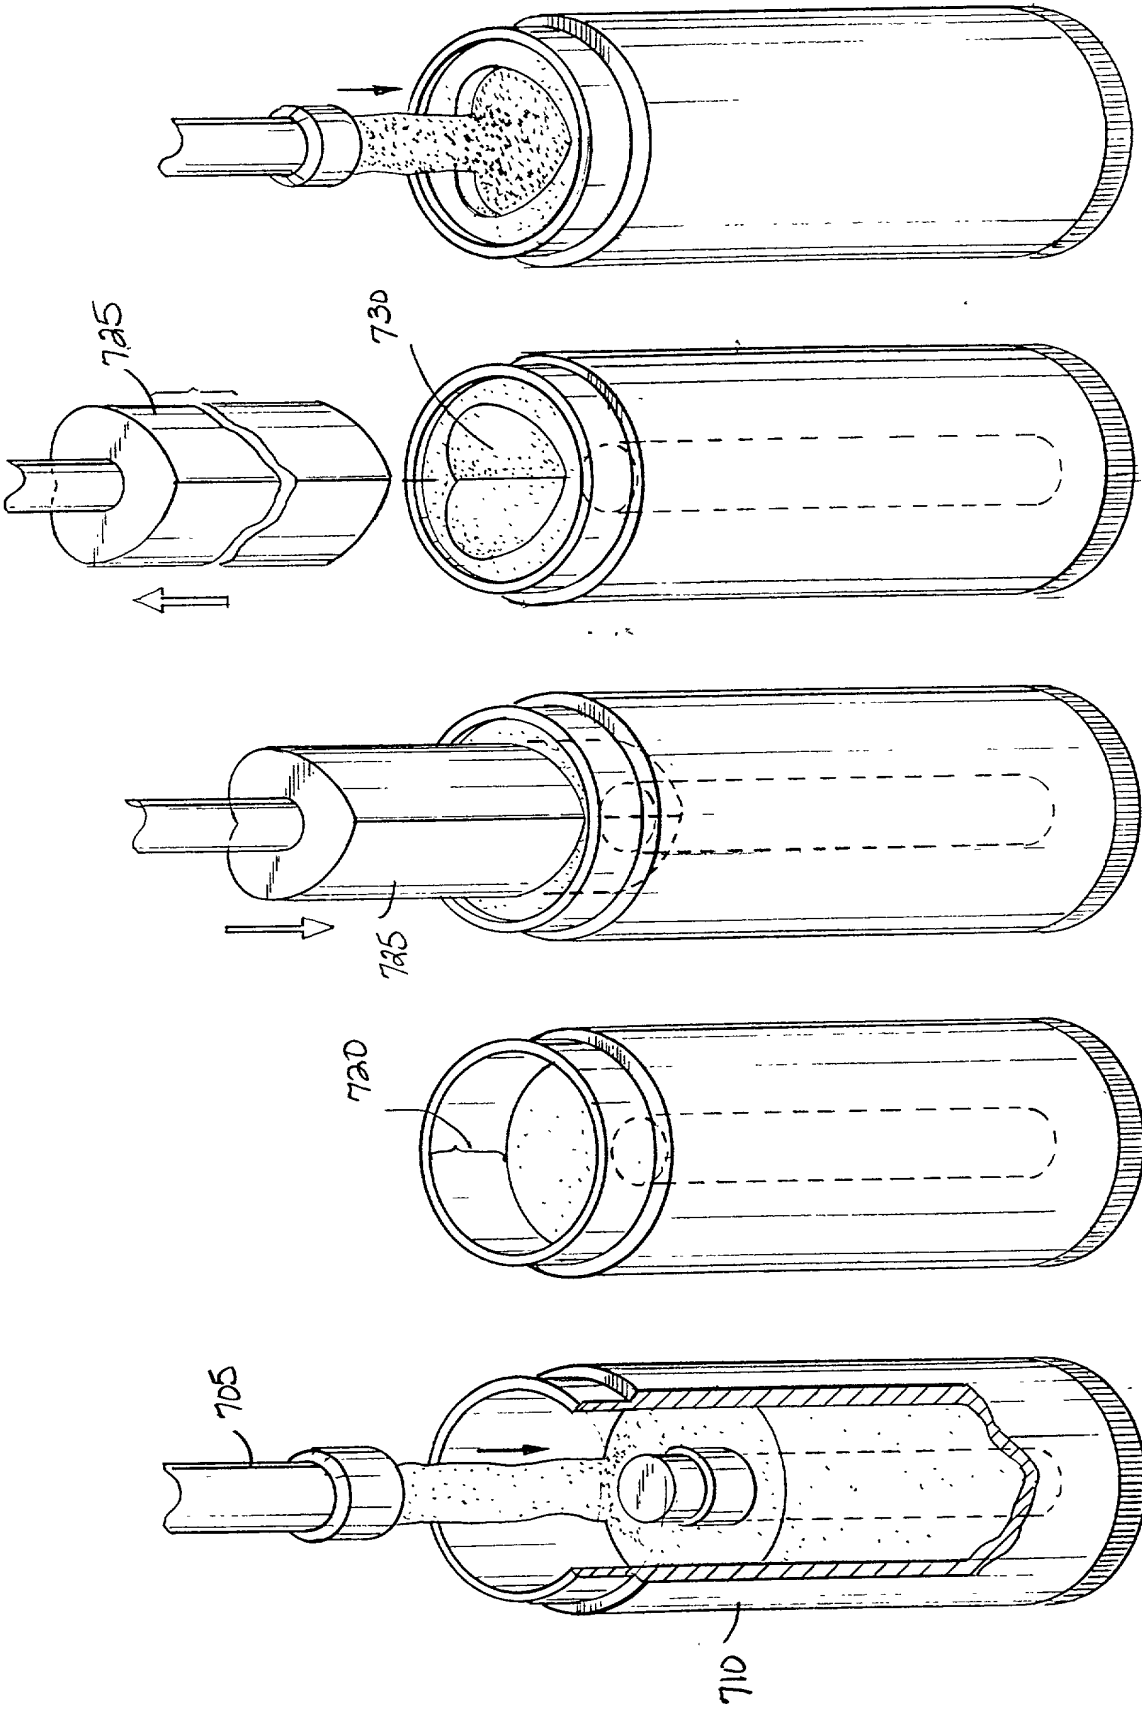

1630/04510
4/13

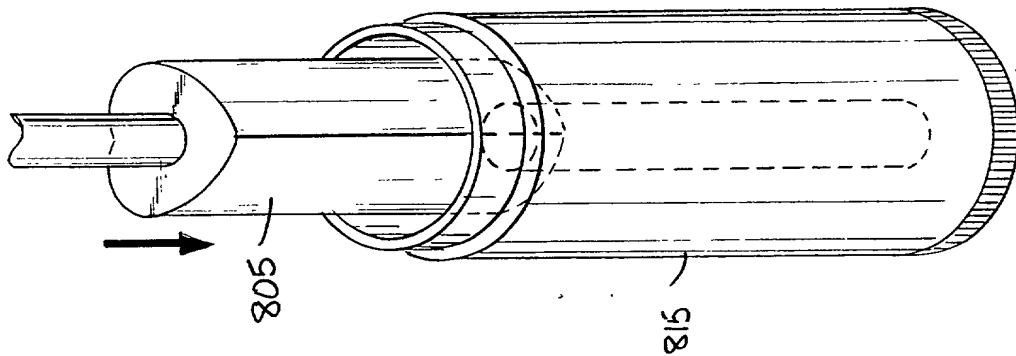


FIG. 7a

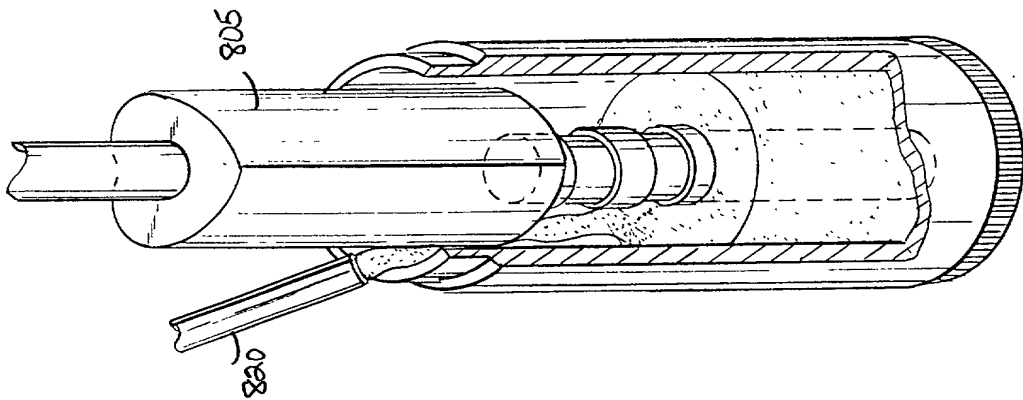


FIG. 7b

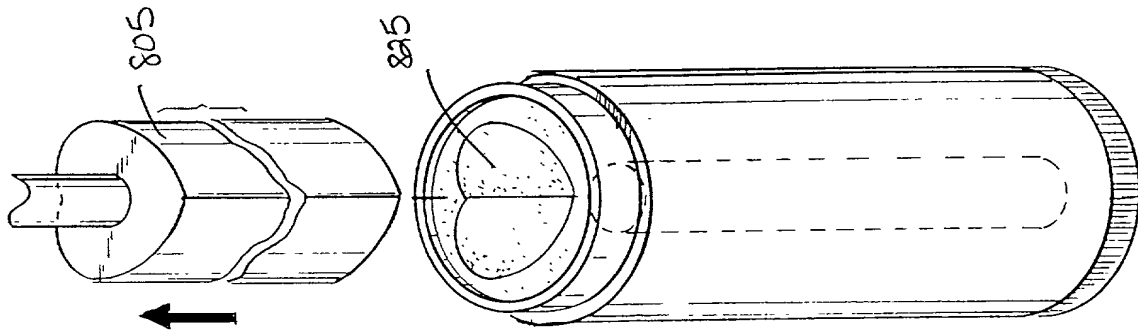


FIG. 7c

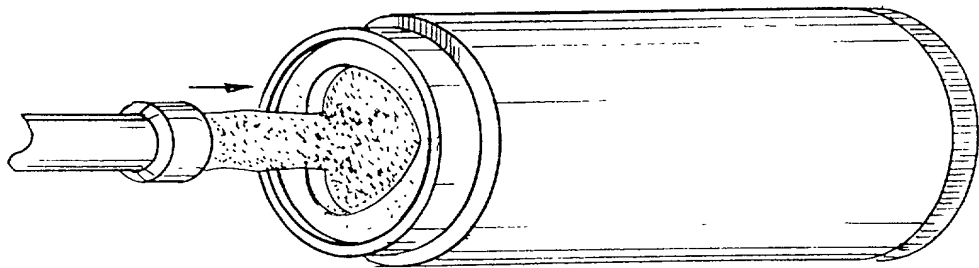


FIG. 7d

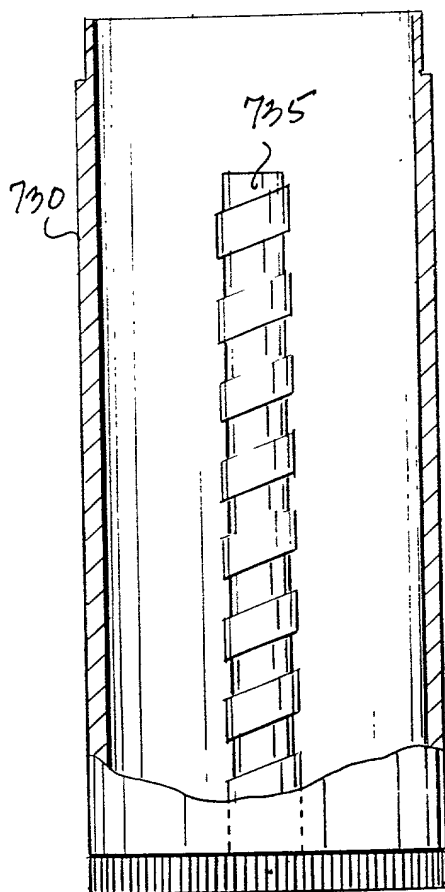
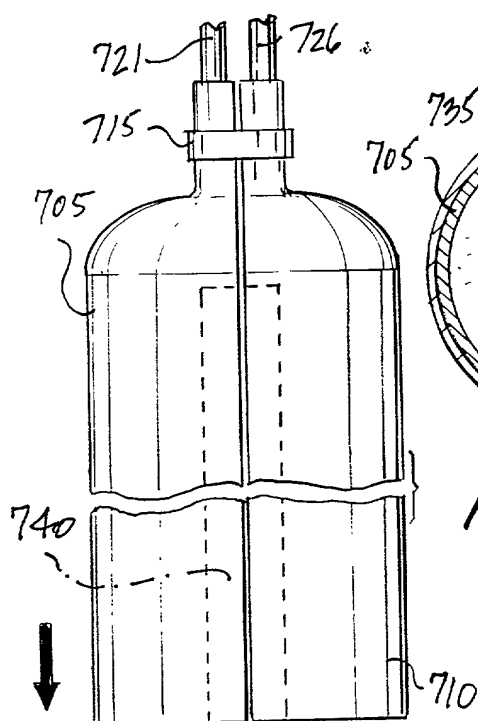


FIG. 8a

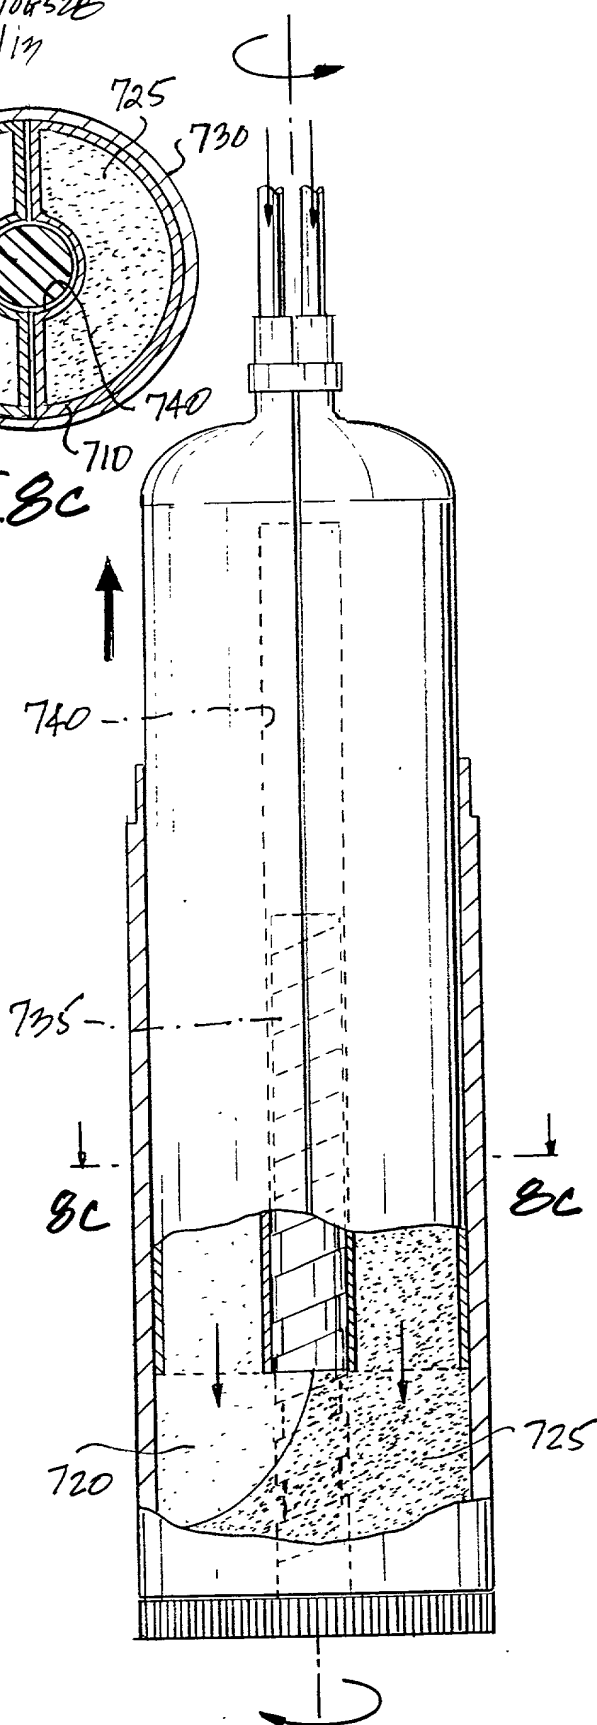
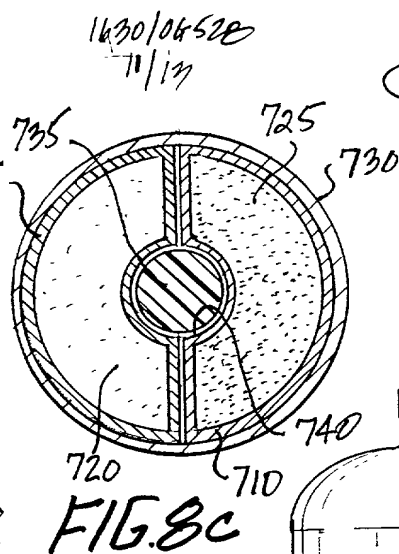


FIG. 8b

0630/04520
11/17/17

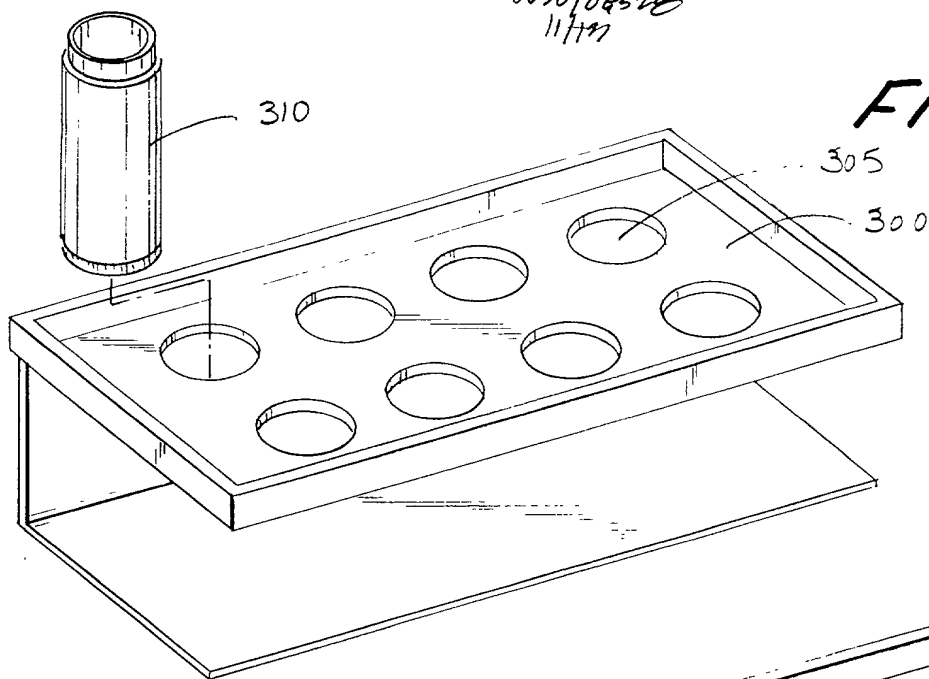
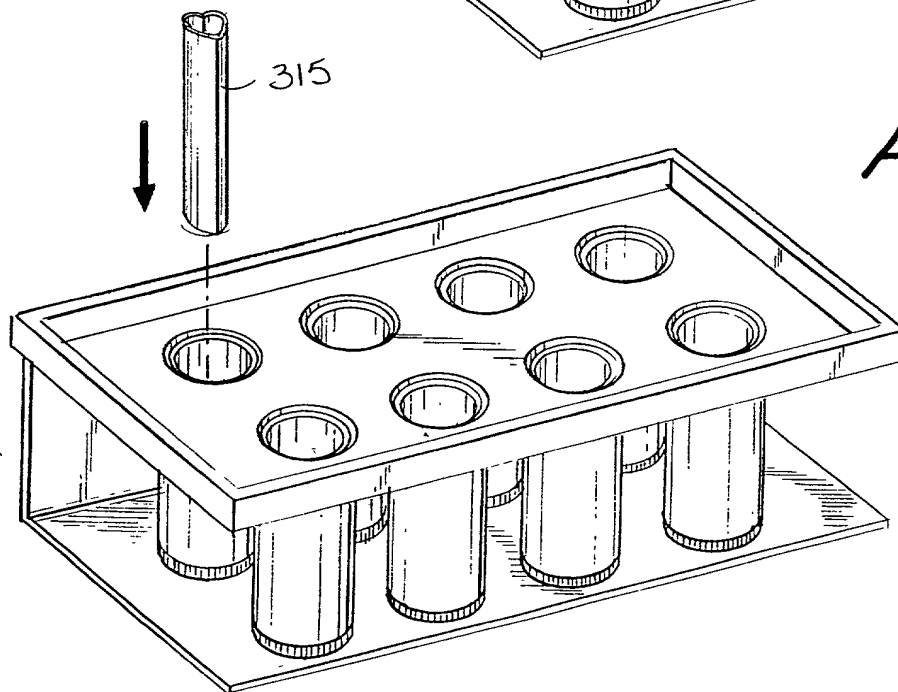
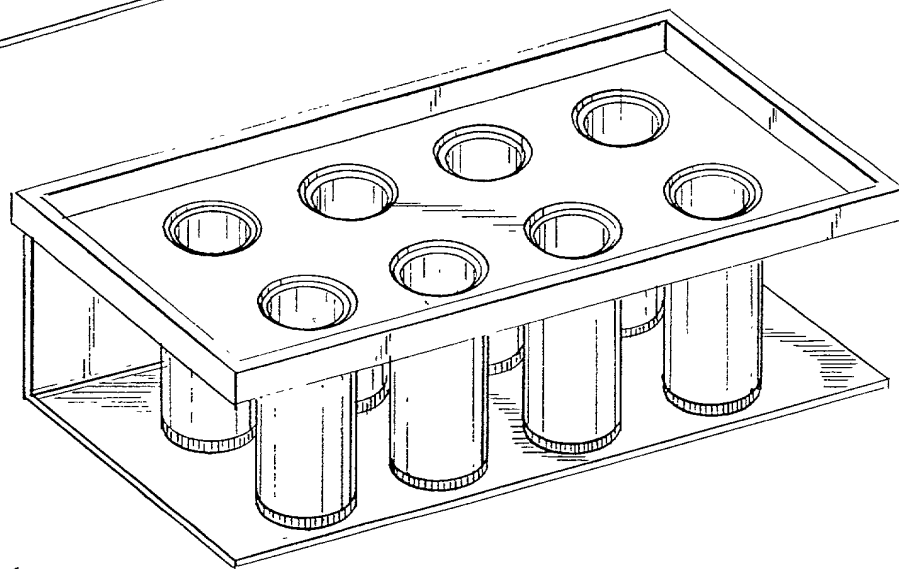


FIG. 9b



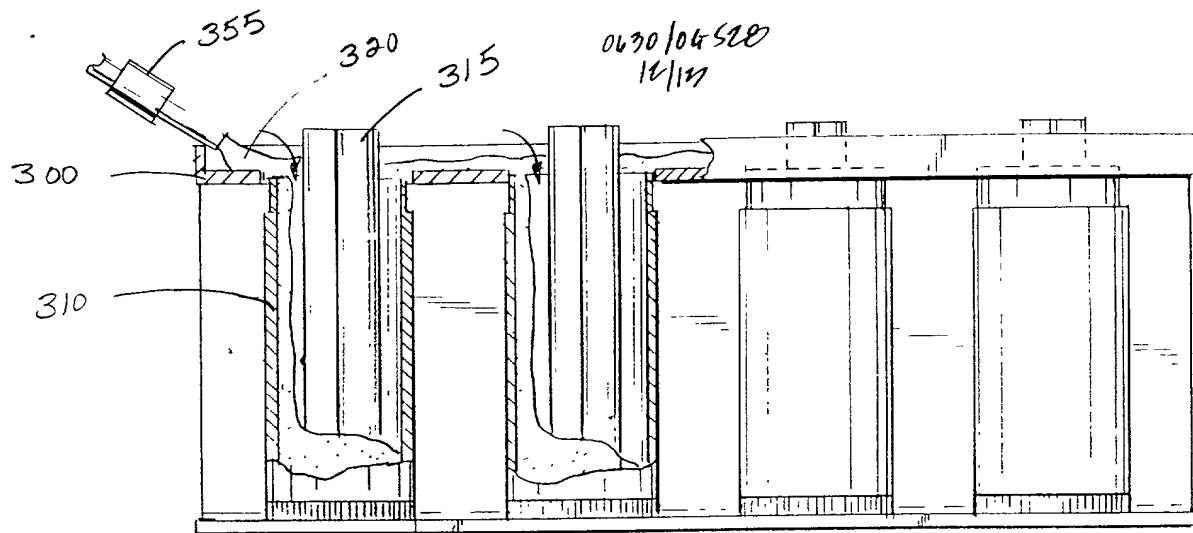


FIG. 9d

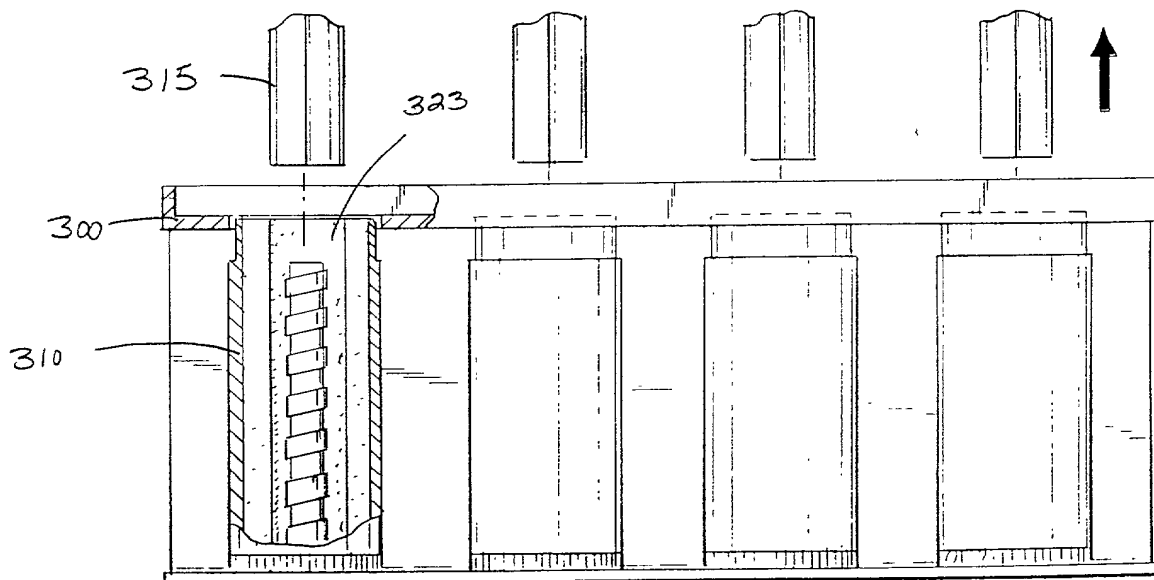


FIG. 9e





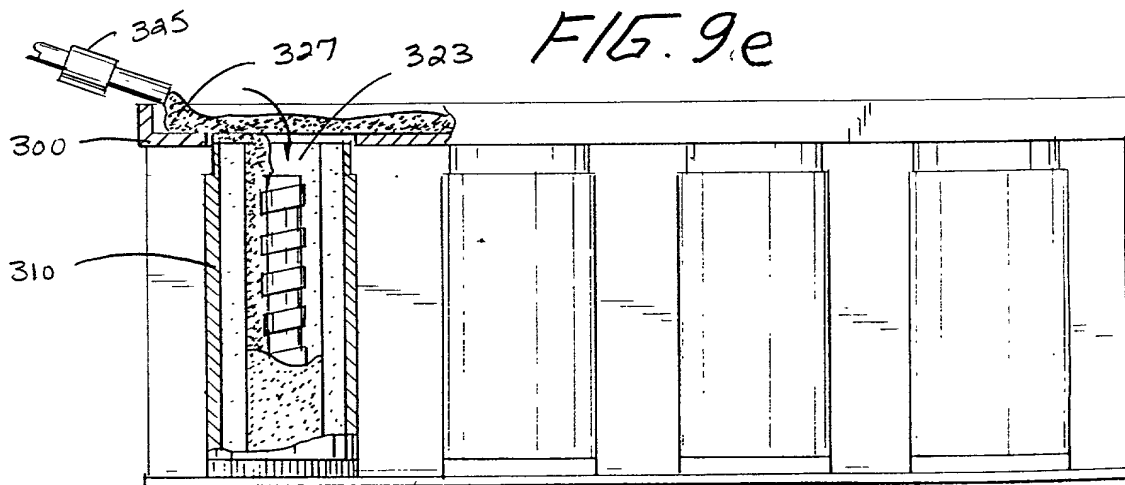


FIG. 9f

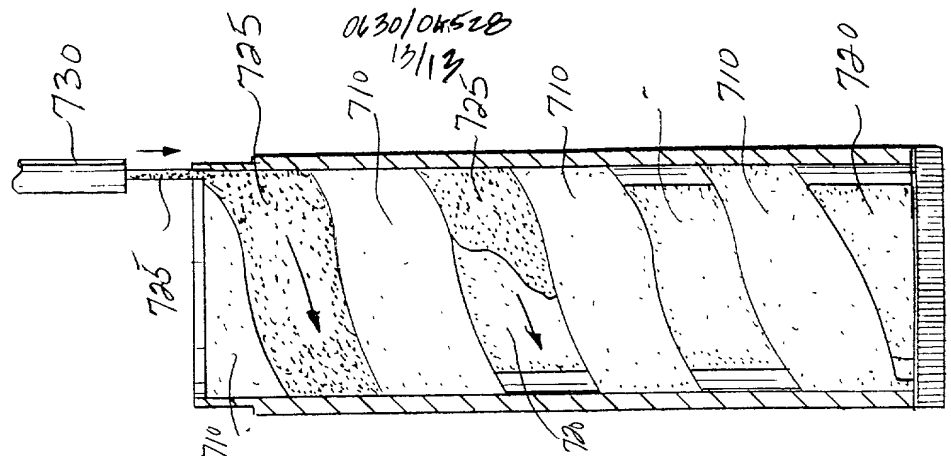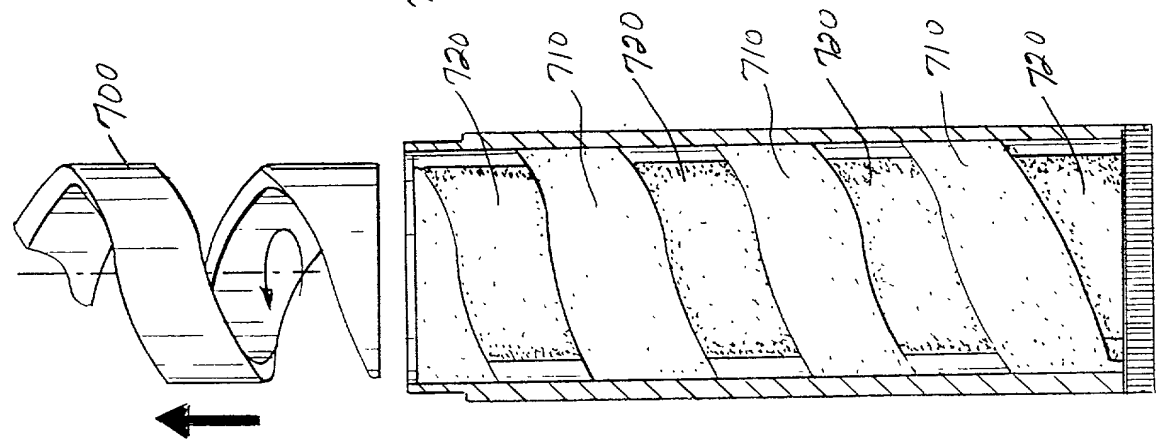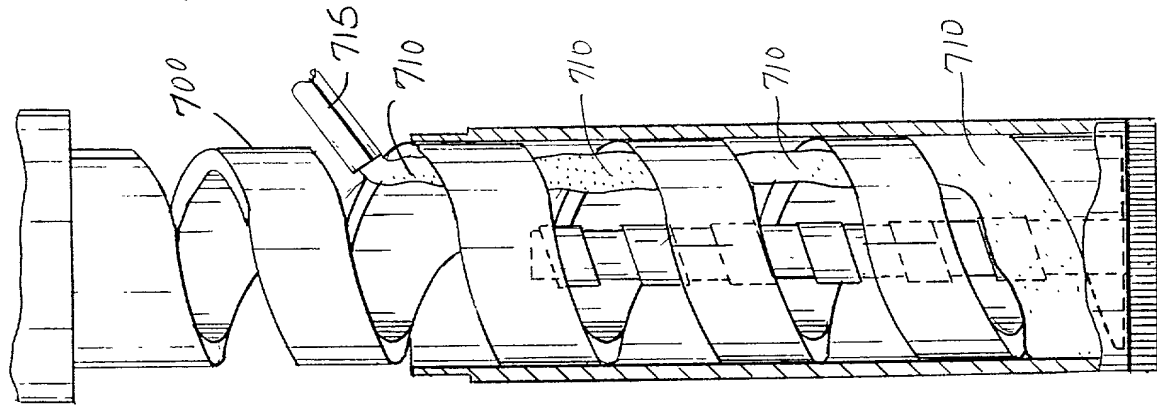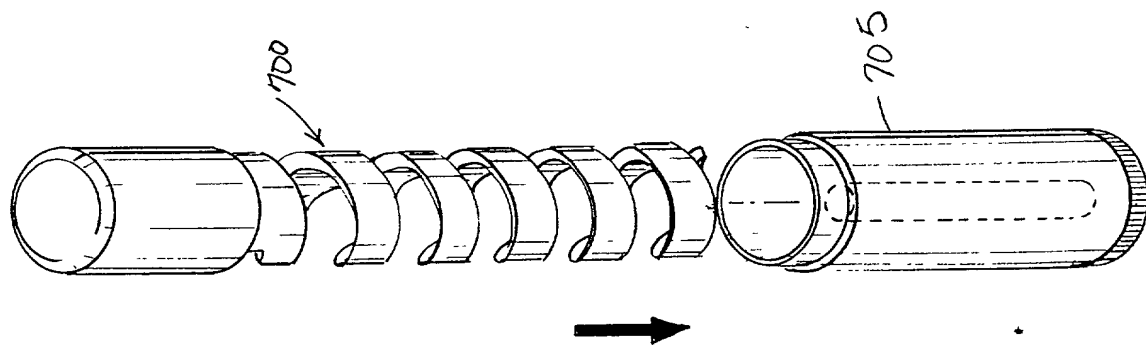

**DECLARATION
AND POWER OF ATTORNEY
Original Application**

As a below named inventor, I declare that the information given herein is true, that I believe that I am the original, first and sole inventor if only one name is listed at 1 below, or a joint inventor if plural inventors are named below, of the invention entitled:

**MULTI-COMPOSITION STICK PRODUCT AND A PROCESS AND SYSTEM FOR
MANUFACTURING THE SAME**

which is described and claimed in:

☒ the attached specification or ☐ the specification in application
Serial No.
filed
(for declaration not accompanying appl.)

that I do not know and do not believe that the same was ever known or used in the United States of America before my or our invention thereof or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application, that I acknowledge my duty to disclose information of which I am aware which is material to patentability in accordance with 37 CFR §1.56. I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I hereby claim the priority benefits under 35 U.S.C. 119 of any application(s) for patent or inventor's certificate listed below. All foreign applications for patent or inventor's certificate on this invention filed by me or my legal representatives or assigns prior to the application(s) of which priority is claimed are also identified below.

PRIOR APPLICATION(S), IF ANY, OF WHICH PRIORITY IS CLAIMED

COUNTRY

APPLICATION NO.

DATE OF FILING

**ALL FOREIGN APPLICATIONS, IF ANY, FILED PRIOR
TO THE APPLICATION(S) OF WHICH PRIORITY IS CLAIMED**

<u>COUNTRY</u>	<u>APPLICATION NO.</u>	<u>DATE OF FILING</u>
----------------	------------------------	-----------------------

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and transact all business in the Patent and Trademark office connected therewith: Gordon D. Coplein #19,165, William F. Dudine, Jr. #20,569, Michael J. Sweedler #19,937, S. Peter Ludwig #25,351, Paul Fields #20,298, Harold E. Wurst #22,183, Joseph B. Lerch #26,936, Melvin C. Garner #26,272, Ethan Horwitz #27,646, Beverly B. Goodwin #28,417, Adda C. Gogoris #29,714, Martin E. Goldstein #20,869, Bert J. Lewen #19,407, Henry Sternberg #22,408, Robert A. Green #28,301, Peter C. Schechter #31,662, Robert Schaffer #31,194, Robert C. Sullivan, Jr. #30,499, Ira J. Levy #35,587, Joseph R. Robinson #33,448, Cheryl F. Cohen, #40,361

all of the firm of DARBY & DARBY P.C., 805 Third Avenue, New York, NY 10022

SEND CORRESPONDENCE TO:

DIRECT TELEPHONE CALLS TO:

DARBY & DARBY P.C.
805 Third Avenue
New York, NY 10022

Cheryl F. Cohen, Ph.D.
212-527-7700

FULL NAME AND RESIDENCE OF INVENTOR 1

LAST NAME: LOOK FIRST NAME: Jee MIDDLE NAME: Loon
CITY: Mechanicsville STATE OR FOREIGN COUNTRY: VA COUNTRY OF CITIZENSHIP: Singapore
POST OFFICE ADDRESS: 9202 Harpe Court CITY: Mechanicsville STATE OR COUNTRY: VA ZIP CODE: 23116

FULL NAME AND RESIDENCE OF INVENTOR 2

LAST NAME: COOPER FIRST NAME: Paul MIDDLE NAME: Joseph
CITY: Chesterfield STATE OR FOREIGN COUNTRY: VA COUNTRY OF CITIZENSHIP: United States
POST OFFICE ADDRESS: 9120 Quail Ridge Road CITY: Chesterfield STATE OR COUNTRY: VA ZIP CODE: 23832

FULL NAME AND RESIDENCE OF INVENTOR 3

LAST NAME: ABU-IZZA FIRST NAME: Khawla MIDDLE NAME: Abdullah
CITY: Richmond STATE OR FOREIGN COUNTRY: VA COUNTRY OF CITIZENSHIP: Jordan
POST OFFICE ADDRESS: 8625 N. Eversham Ct. CITY: Richmond STATE OR COUNTRY: VA ZIP CODE: 23294

FULL NAME AND RESIDENCE OF INVENTOR 4

LAST NAME: WILSON FIRST NAME: Joyce MIDDLE NAME: H.
CITY: Richmond STATE OR FOREIGN COUNTRY: VA COUNTRY OF CITIZENSHIP: United States
POST OFFICE ADDRESS: 4116 Valley Side Rd. CITY: Richmond STATE OR COUNTRY: VA ZIP CODE: 23223

FULL NAME AND RESIDENCE OF INVENTOR 5

LAST NAME: RAMAN

FIRST NAME: Krishna

MIDDLE NAME: P.

CITY: Glen Allen

STATE OR FOREIGN COUNTRY: VA COUNTRY OF CITIZENSHIP: United States

POST OFFICE ADDRESS: 5729 Rolling Creek Place CITY: Glen Allen STATE OR COUNTRY: VA ZIP CODE: 23060

FULL NAME AND RESIDENCE OF INVENTOR 6

LAST NAME: LI

FIRST NAME: Vincent

MIDDLE NAME: Hon-Kin

CITY: Mechanicsville

STATE OR FOREIGN COUNTRY: VA COUNTRY OF CITIZENSHIP: United States

POST OFFICE ADDRESS: 11023 Stonefield Court CITY: Mechanicsville STATE OR COUNTRY: VA ZIP CODE: 23116

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR : _____ DATED: _____
Jee Loon LOOK

SIGNATURE OF INVENTOR : _____ DATED: _____
Paul Joseph COOPER

SIGNATURE OF INVENTOR : _____ DATED: _____
Khawla Abdullah ABU-IZZA

SIGNATURE OF INVENTOR : _____ DATED: _____
Joyce H. WILSON

SIGNATURE OF INVENTOR : _____ DATED: _____
Krishna P. RAMAN

SIGNATURE OF INVENTOR : _____ DATED: _____
Vincent Hon-Kin LI

(D&D Forms/PTO-21)

[illegible]